

SOLID WASTE MANAGEMENT

**Overview,
Characterization,
Processing, and
Ultimate Disposal**



Land Pollution

■ Land pollution:

- 1) Destruction of the Earth's surface caused by human activities, and
- 2) Misuse of “natural resources”.

❑ **Natural resources:** Land and raw materials that exist naturally in the environment undisturbed by humans.

A. Renewable resource: A natural resource that can be replaced by a natural process (e.g. *groundwater, biomass*).

B. Non-renewable resource: A natural resource that cannot be produced or re-grown or reused (e.g. *oil, natural gas, minerals*).

❑ Land pollution problems include:

1. Acid mine drainage
2. Agrochemicals (Pesticides and herbicides)
3. **Landfills (solid waste disposal).**



How do we reduce land pollution?



Definition of Wastes

According to the **International Basel Convention**, the definition of Wastes is as follows:

- **WASTES:** “Substances or objects which are
 - disposed of , or are
 - intended to be disposed of , or are
 - required to be disposed of by the provisions of the law”.
- **Disposal** includes:
“any operation which may lead to resource recovery, recycling, reclamation, direct re-use or alternative uses.

(Annex IVB, Basel convention,
Signed March, 1989 and enforced May 1992).

Sources of Solid Wastes




Households



Institutions,
Commerce and Industry



Agriculture (both crops
and livestock)

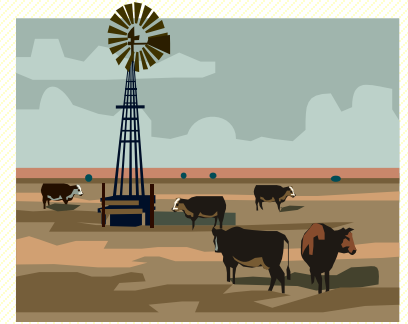

Classification of Wastes according to their Effects

- **Hazardous wastes**
- Substances unsafe to use commercially, industrially, agriculturally, or economically and have any of the following properties- ignitability, corrosivity, reactivity & toxicity.
- **Non-hazardous**
- Substances safe to use commercially, industrially, agriculturally, or economically and do not have any of those properties mentioned above. These substances usually create disposal problems.

Classification of Solid Wastes According to their Properties

- ❑ **Bio-degradable:** can be degraded (paper, wood, fruits and others); *produce biogas, fertilizer, etc...*
- ❑ **Non-biodegradable:** cannot be degraded (plastics, bottles, old machines, cans, styrofoam containers and others); *many are recyclable*

AND

- ❑ **Combustible:** organic (paper, wood, food waste, etc.) ; *recover energy*
- ❑ **Non-combustible:** inorganic (glass, metal and others); *recover materials*

Solid waste generation rates

Current waste generation per capita by Income Level

Income level	Waste generation per capita (kg/capita/day)		
	Lower boundary	Upper Boundary	Average
High	0.70	14	2.1
Upper Middle	0.11	5.5	1.2
Lower Middle	0.16	5.3	0.79
Lower	0.09	4.3	0.60

Average MSW generation rates by Income Level

Income Level	Average MSW generation (kg/capita/day)
Low income	0.6-1.0
Middle income	0.8-1.5
High income	1.1-4.5

Source: Global Review of Solid Waste Management

Composition of MSW

Proximate Analysis		Ultimate Analysis	
Moisture	16.9 (wt%)	C (carbon)	53.84 (wt%)
Volatile	55.1 (wt%)	H (hydrogen)	5.73 (wt%)
Fixed carbon	8 (wt%)	O (oxygen)	32.93 (wt%)
Ash	20 (%)	N (nitrogen)	1.68 (wt%)
Calorific value	2388 (kcal/kg)	S (sulfur)	0.87 (wt%)

Typical data on the ultimate analysis of the combustible components in residential MSW^a


Component	Percent by weight (dry basis)					
	Carbon	Hydrogen	Oxygen	Nitrogen	Sulfur	Ash
Organic						
Food wastes	48.0	6.4	37.6	2.6	0.4	5.0
Paper	43.5	6.0	44.0	0.3	0.2	6.0
Cardboard	44.0	5.9	44.6	0.3	0.2	5.0
Plastics	60.0	7.2	22.8	—	—	10.0
Textiles	55.0	6.6	31.2	4.6	0.15	2.5
Rubber	78.0	10.0	—	2.0	—	10.0
Leather	60.0	8.0	11.6	10.0	0.4	10.0
Yard wastes	47.8	6.0	38.0	3.4	0.3	4.5
Wood	49.5	6.0	42.7	0.2	0.1	1.5
Inorganic						
Glass ^b	0.5	0.1	0.4	<0.1	—	98.9
Metals ^b	4.5	0.6	4.3	<0.1	—	90.5
Dirt, ash, etc.	26.3	3.0	2.0	0.5	0.2	68.0

^a Adapted in part from Ref. 6.

^b Organic content is from coatings, labels, and other attached materials.


Total MSW generation in the United States by type of waste, 2015

Total = 262 million tons

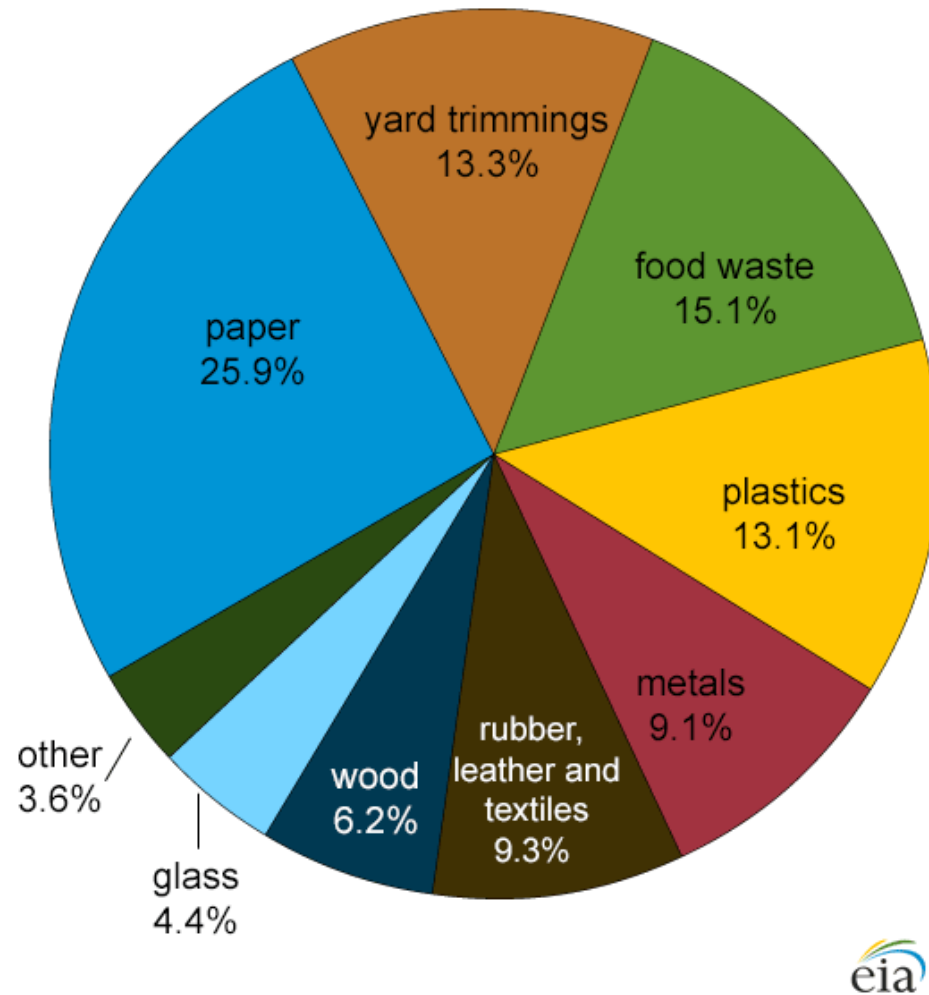


Source: U.S. Environmental Protection Agency, Advancing Sustainable Materials Management: 2015 Fact Sheet, July 2018

Solid Waste Management

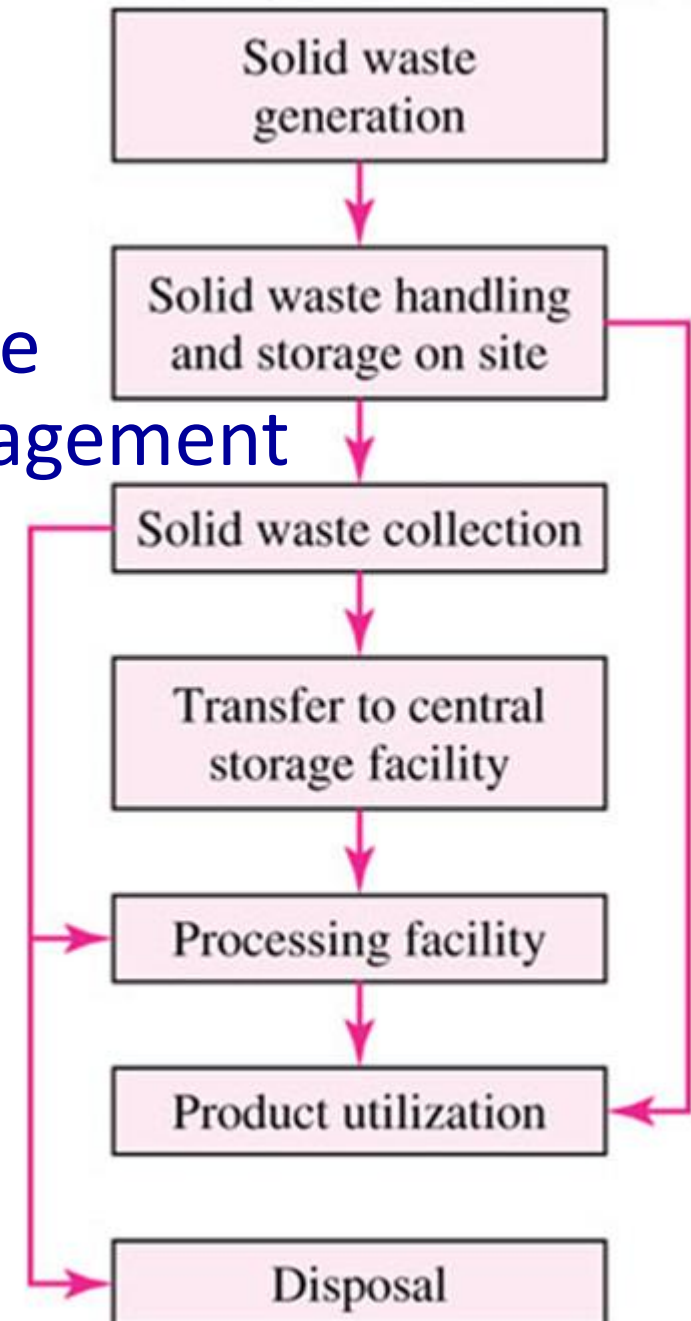

Objectives of SWM

- ❑ The first objective of **solid waste management** is to remove discarded materials from inhabited places in a timely manner:
 - a) to prevent the spread of disease,
 - b) to minimize the likelihood of fires, and
 - c) to reduce aesthetic insults arising from putrefying organic matter.
- ❑ The second objective, which is equally important, is to dispose of the discarded materials in a manner that is environmentally acceptable.

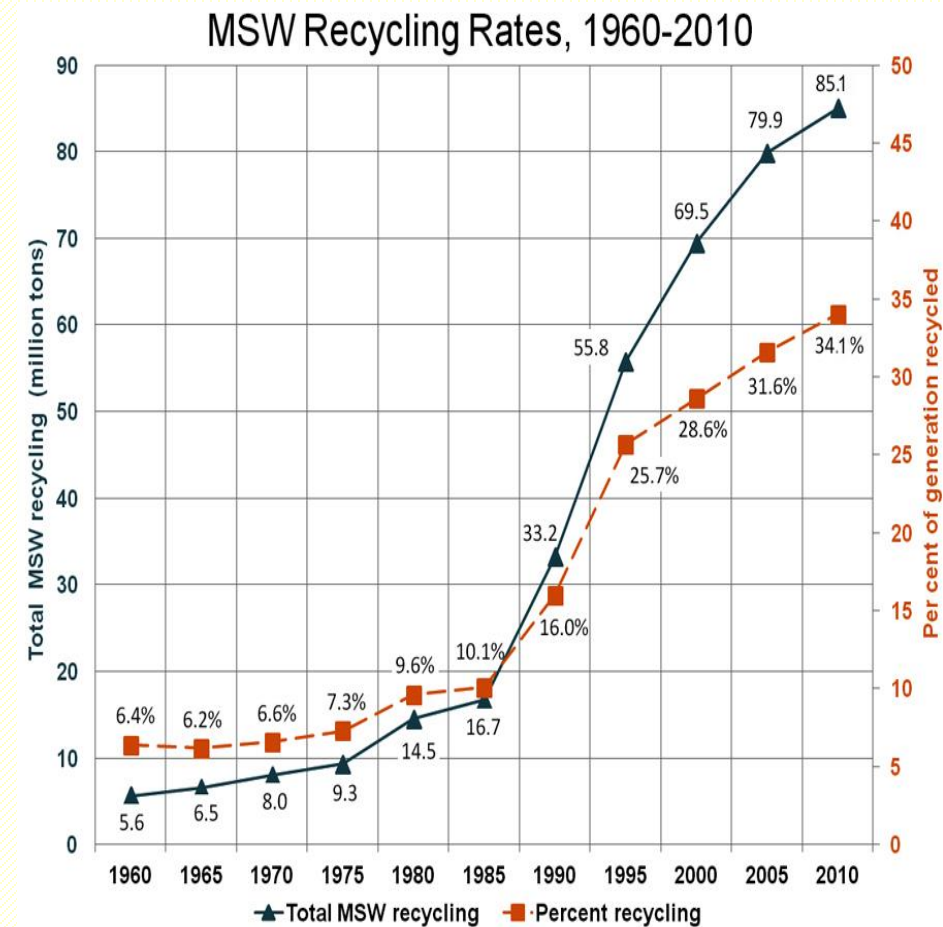

Waste can be a resource

Sustainability in Solid Waste Management

- Sustainable Waste Management needs to be:

1. Environmentally effective
2. Economically affordable
3. Socially acceptable



- Sustainable solid waste management systems can be engineered by accepting the concept of an “**Integrated solid waste management**”.

This concept:

- a) takes an overall approach and manages waste in an environmentally effective and economically affordable way;
- b) involves the use of a range of different treatment options at a local level; and
- c) considers the entire solid waste stream.

Solid Waste Management Hierarchy

MOST PREFERRED OPTION



PREVENTION

Maximum conservation of resources

REUSE

Reusing materials

RECYCLE

Recycling and reprocessing materials

ENERGY RECOVERY

Energy recovery prior to disposal

DISPOSAL

Landfill and incineration without energy

LEAST PREFERRED OPTION

Modern Trends in Waste Management

- **Zero waste:** Environmentally correct concept is to consider wastes as resources out of place to be used again.
- **Industrial ecology:**
 - Study of relationships among industrial systems and their links to natural systems.
 - Waste from one part of the system would be a resource for another part.
- **Taxation policy:** Countries have moved to cut waste by imposing taxes.
 - Taxation of waste in all its various forms, from emissions from smokestacks to solids delivered to landfills.
 - As taxes increase people produce less waste.

Solid waste collection



Solid waste collection

- Collection includes: (a) temporary storage or containerization, (b) transfer to a collection vehicle, and (c) transport to a site where the waste undergoes *processing and ultimate disposal*.
- Waste collection is the **most expensive phase**, largely because it is labor- intensive.



Solid waste processing


Objectives :

1. To save landfill area and volume by reducing total weight and volume of solid waste.
2. To improve and economize the handling and transfer of solid waste by changing its physical form (size, density, moisture content).
3. To recover natural resources in the waste material for reuse or recycling (plastic, metal, glass, paper as well as organic matter as *compost*).
4. To recover energy value from the organic (*combustible*) fraction of solid waste.

Main Steps in solid waste processing

The most widely used MSW processing includes:

1. Separation, sorting, classification
2. Shredding and pulverizing
3. Moisture control or dewatering
4. Recycling
5. Composting
6. Incineration

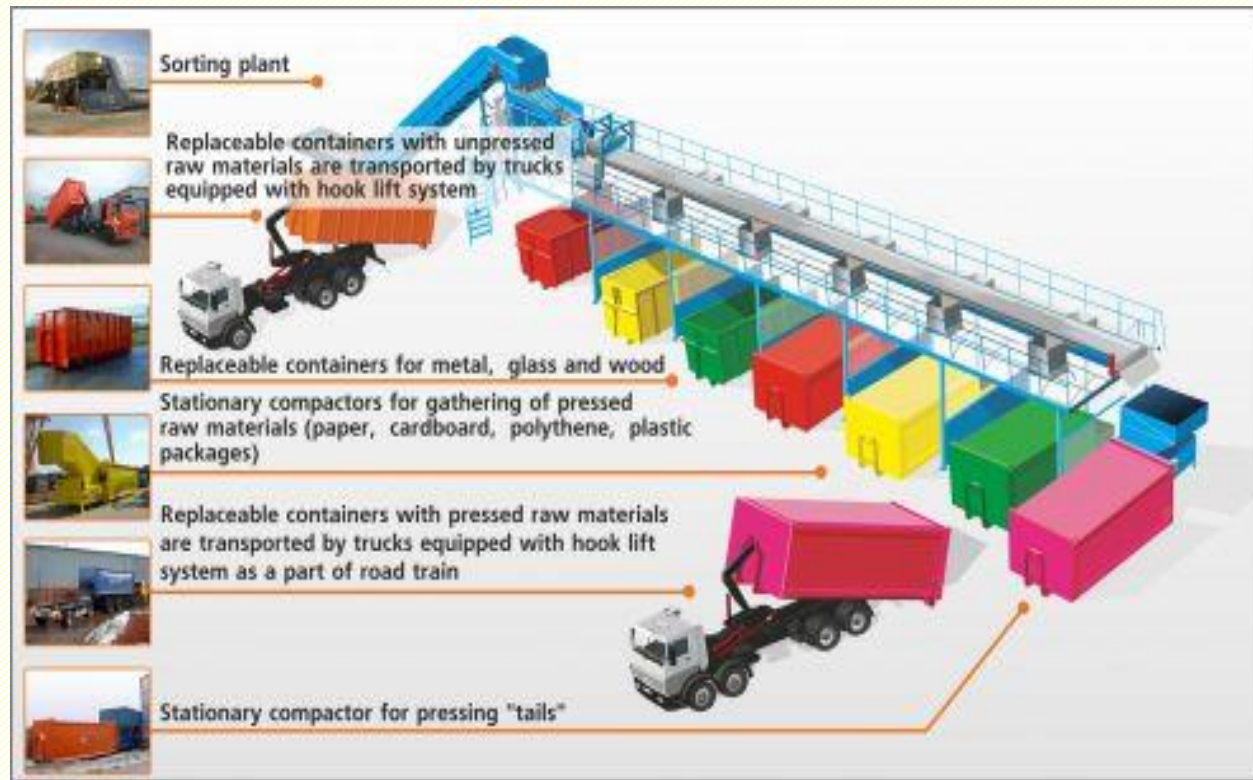

Separation & Shredding

- The first step in a landfill volume enhancement program, some materials may be reclaimed at a central processing point.
- The most likely candidates for **recycling** are *paper and ferrous metals*.
 - Paper generally is removed by hand as the MSW passes along on a conveyor belt.
 - After passing through a shredder, ferrous metals can be removed using a magnetic separator.
- Asphaltic concrete plants may be able to use the *shredded tires* in their raw material feedstock.



Recycling


- ◎ Is the reprocessing of wastes to recover an original raw material.
 - At its lowest and most appropriate technological level, the materials are *separated at the source* by the consumer.
 - This is the most appropriate level because it requires the minimum expenditure of energy.
- ◎ Generally, the recycling options available to a **municipality** for residential use include:
 1. Curbside (or Kerbside) collection
 2. Drop-off centers
 3. Material transfer stations.
 4. Material processing facility



2017 Curbside Collection Schedule

Material	Week 1	Week 2	Week 3	Week 4
Organics	✓	✓	✓	✓
Recycling	✓	✓	✓	✓
Residual Garbage		✓		✓

Waste (paper, glass, plastic, metals, ...)

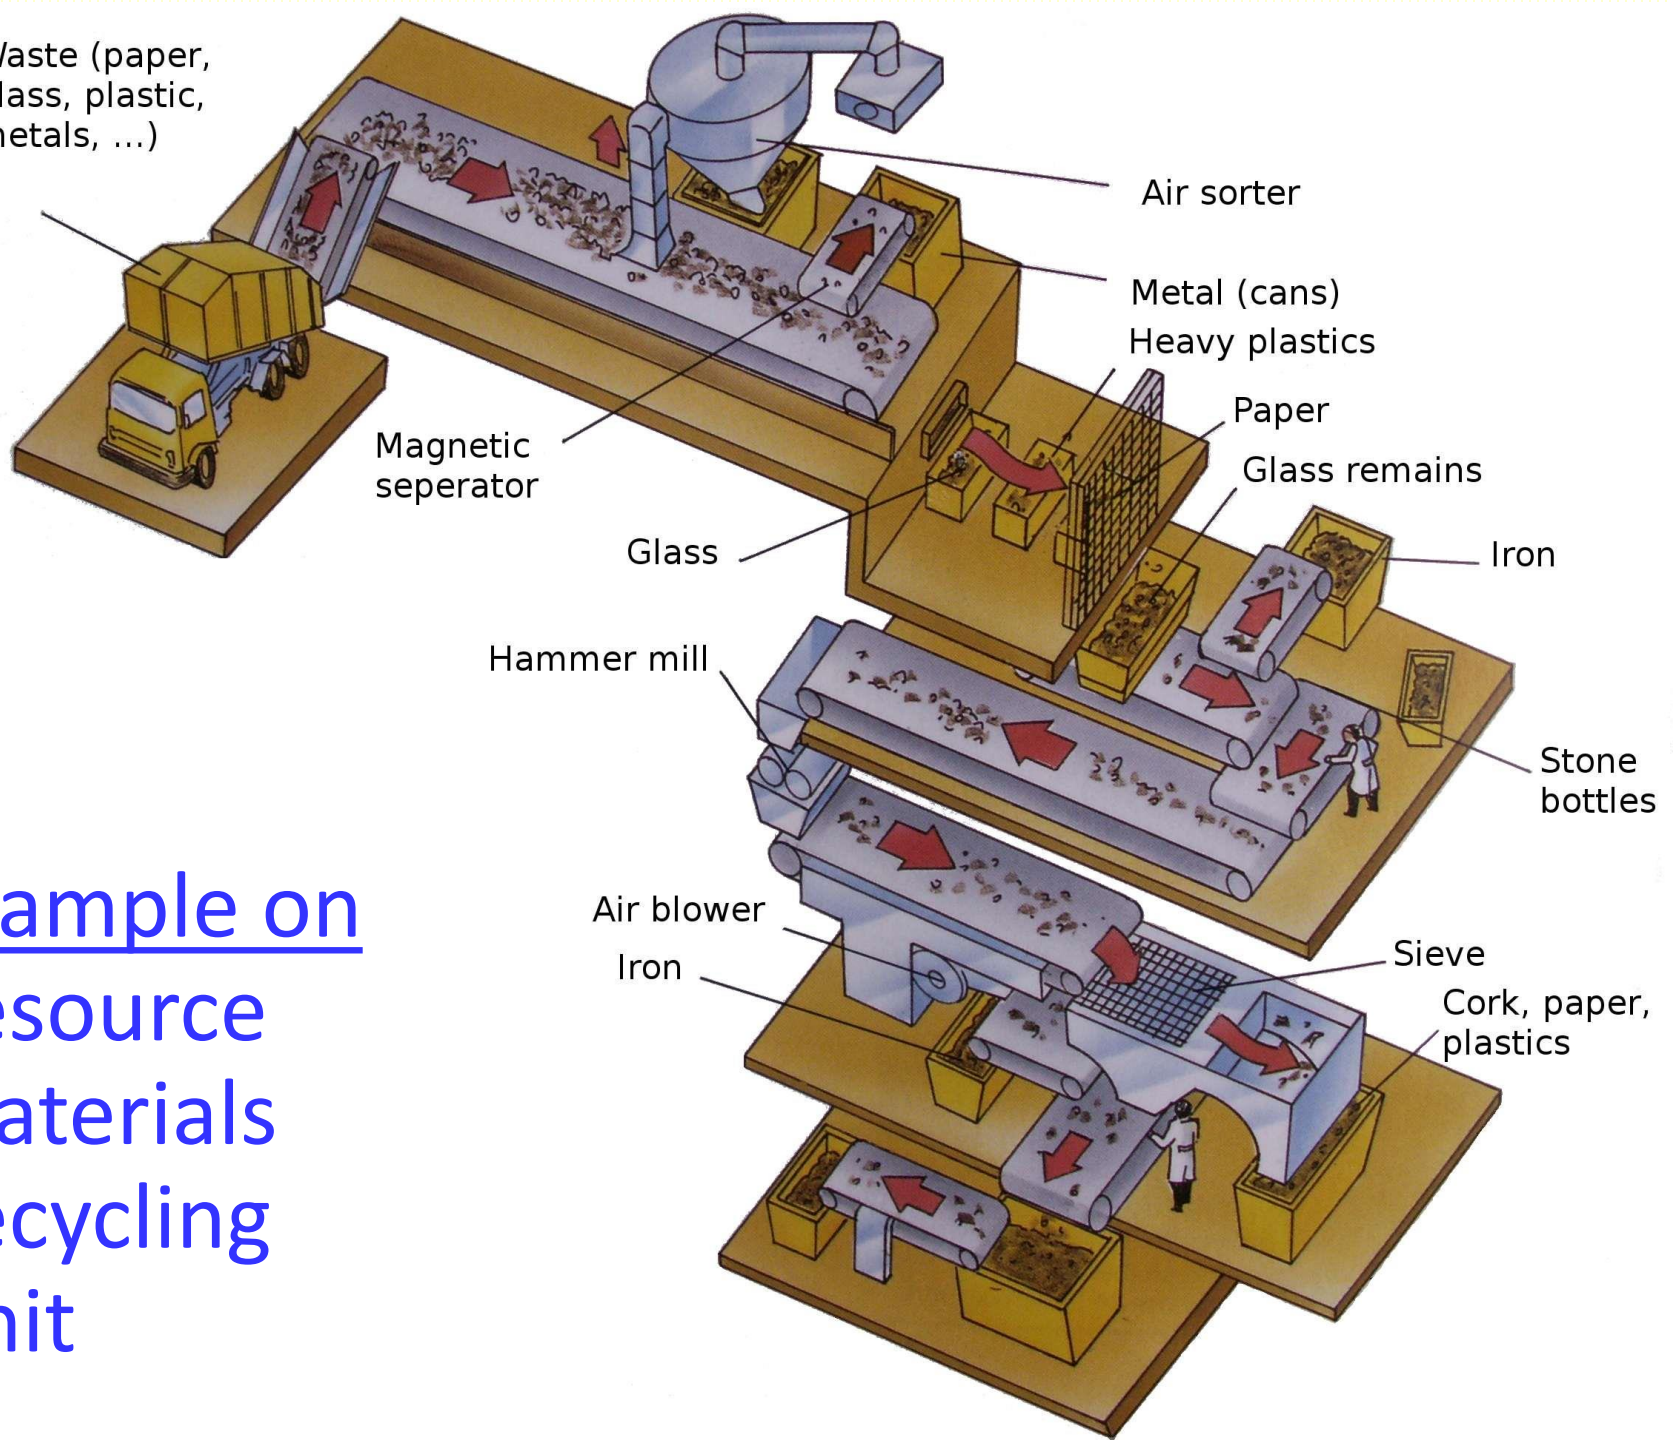


Example on Resource Materials Recycling Unit


Composting

- ◎ Composting is a process in which the organic portion of MSW is allowed to *decompose under carefully controlled conditions by the action of bacteria, fungi and other microorganisms.*
- ◎ With proper control of moisture, temperature and aeration, a composting plant can reduce the volume of the raw organic material by as much as *50 percent*.
- ◎ A complete municipal solid waste composting operation includes *sorting and separating, shredding and pulverizing, digestion, product upgrading and marketing.*
- ◎ The composting waste is aerated by periodically turning each windrow.
 - This can be done manually with a pitchfork, but at most large facilities it is machinery.
 - Some of these machines turn and rebuild the windrow directly behind the machine; others rebuild the turned windrow adjacent to its original position (see Figure).

Composting

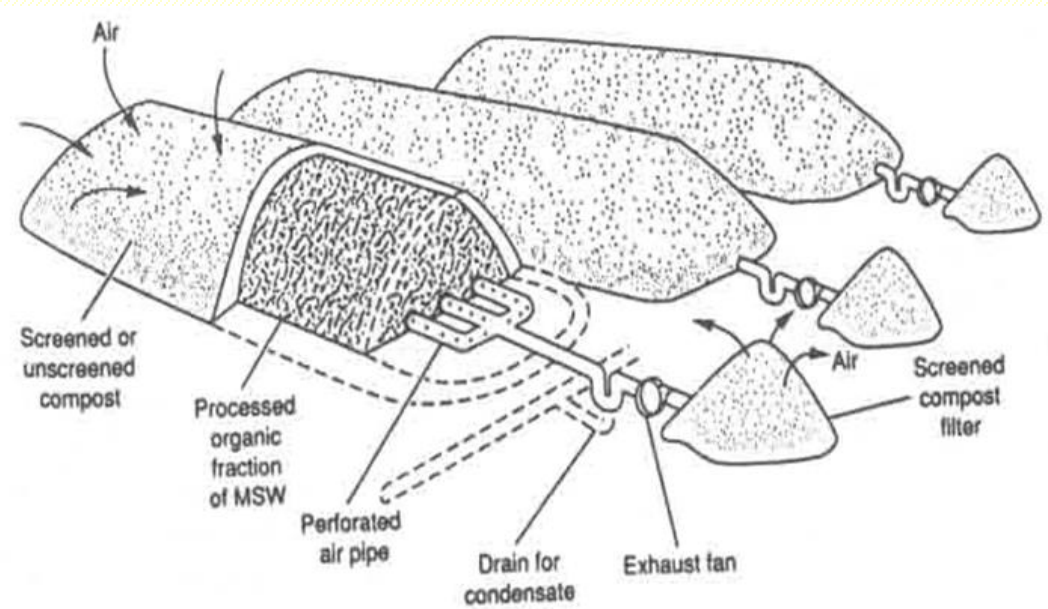


Composting - windrow

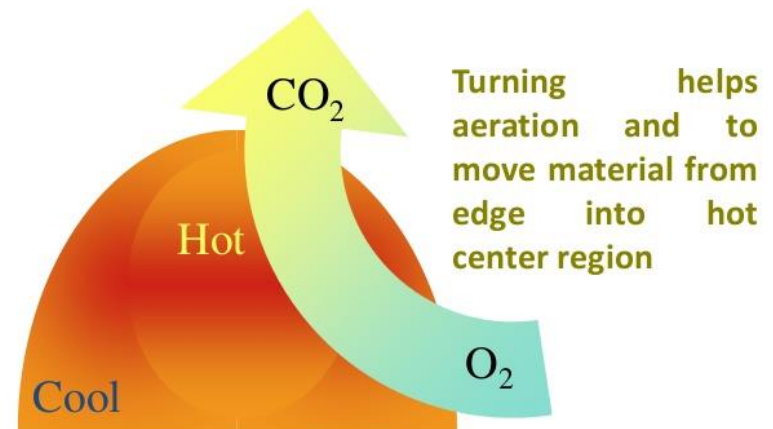

Graphic credit: Tom Richard, Penn State University¹⁰

Figure 8. Schematic of aerated static pile composting system.

• Biological process

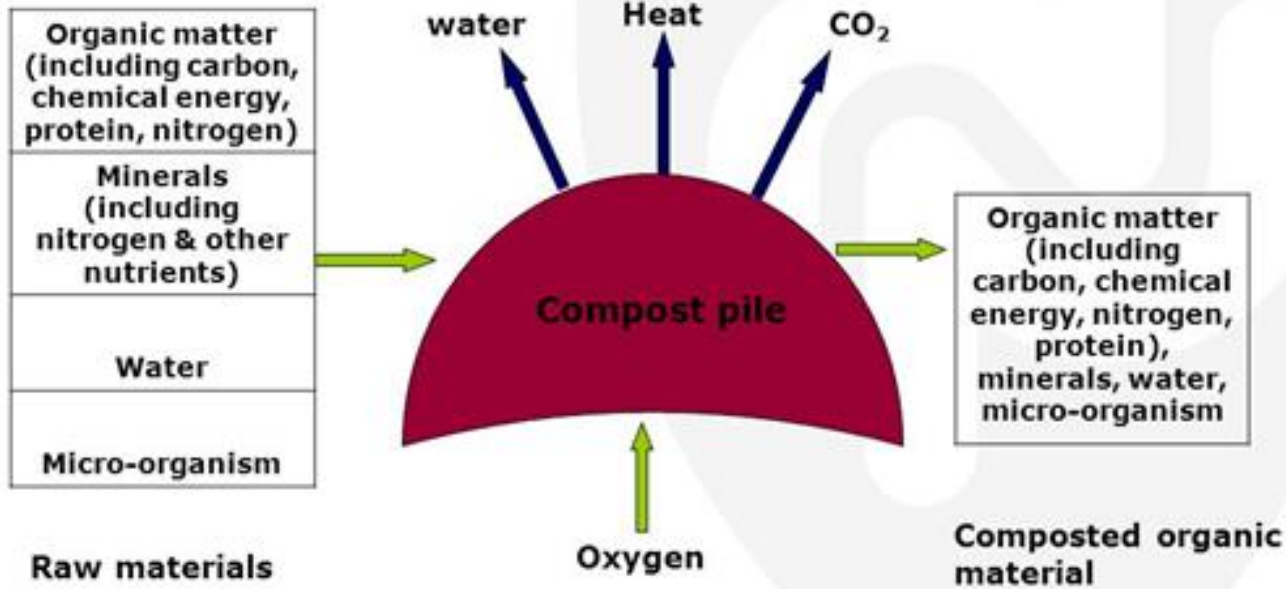

Composting


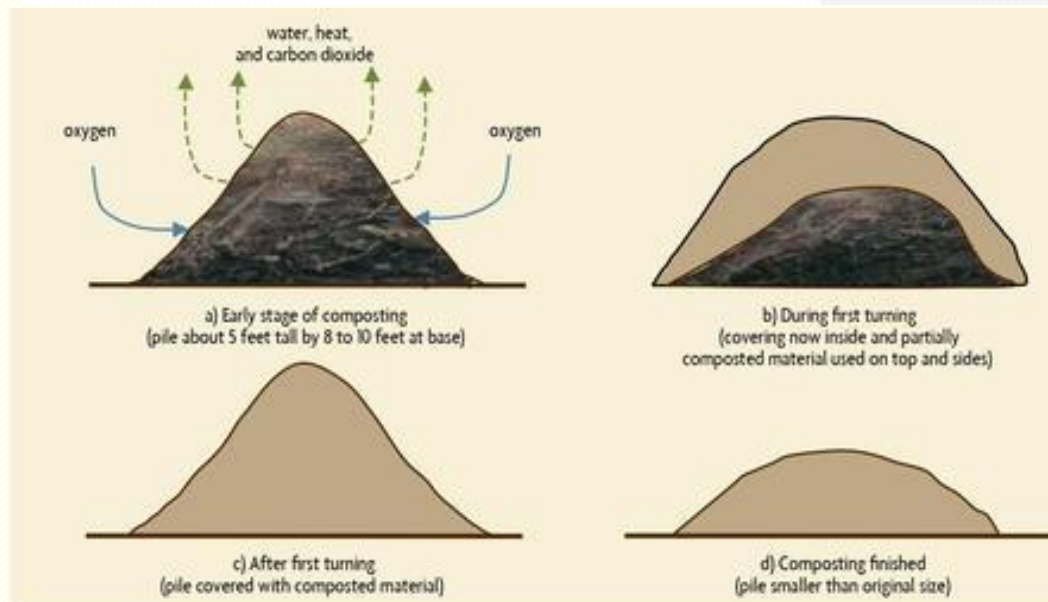


Figure 13.2. Compost pile dimensions and turning techniques.

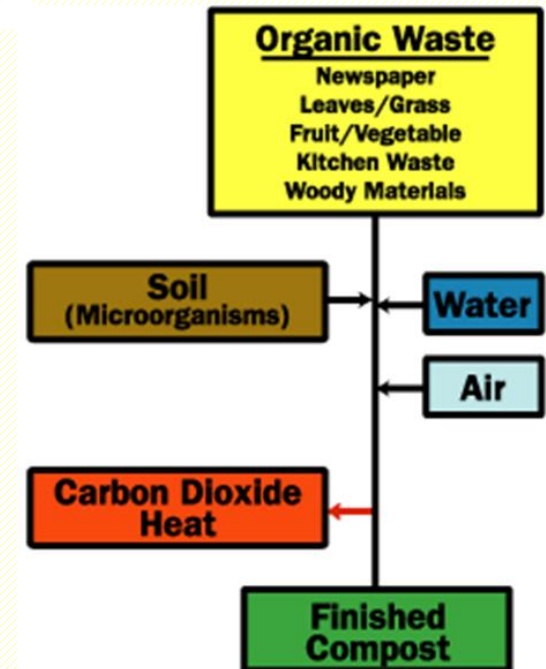

Composting

- ◎ Product is “Compost”, which is a humus-like material that results from the aerobic biological stabilization of the organic materials in solid waste.
- ◎ Compost is useful as a soil conditioner. In this role compost will:
 - 1) improve soil structure,
 - 2) increase moisture-holding capacity,
 - 3) reduce leaching of soluble nitrogen, and
 - 4) increase the buffer capacity of the soil.
- ◎ Compost also has a value as plant fertilizer. It contains a small percentage of major nutrients, such as nitrogen, phosphorus, and potash.

INCINERATION


1. **Incineration** is a thermal oxidation with the furnace temperatures are about 815-1400 °C.
2. **Incineration results** in products of complete or incomplete combustion): CO₂, H₂O, CO, hydrocarbon, other organic matter, NO_x
3. **Operation of incinerator:**
 - Good understanding of waste characteristics
 - Technical skills of operator
 - Control of waste feed
 - Mixing of wastes
 - Constant Temperature
 - Excess air
 - Flue gas control
 - Regular maintenance



INCINERATION

- Four main types of incinerators:
 - 1) Conventional (Mass-Fired) Incinerators
 - 2) Modular Incinerators
 - 3) Fluidized Bed Incinerators
 - 4) Refuse-Derived Fuel Facilities
- Incineration has been used to reduce the bulk of the solid waste:
 - a) Where *land is no longer abundant* or
 - b) where *geotechnical and environmental considerations* would limit the use of a sanitary landfill.
- The basic arrangement of the conventional incinerator is shown in *Figure (Next)*.
- Although the solid waste may have some **heat value**, it is normally quite wet and is not self-sustaining in combustion until it is dried.
- Conventionally, **auxiliary fuel** is provided for the initial drying stages.

ROTARY KILN INCINERATOR

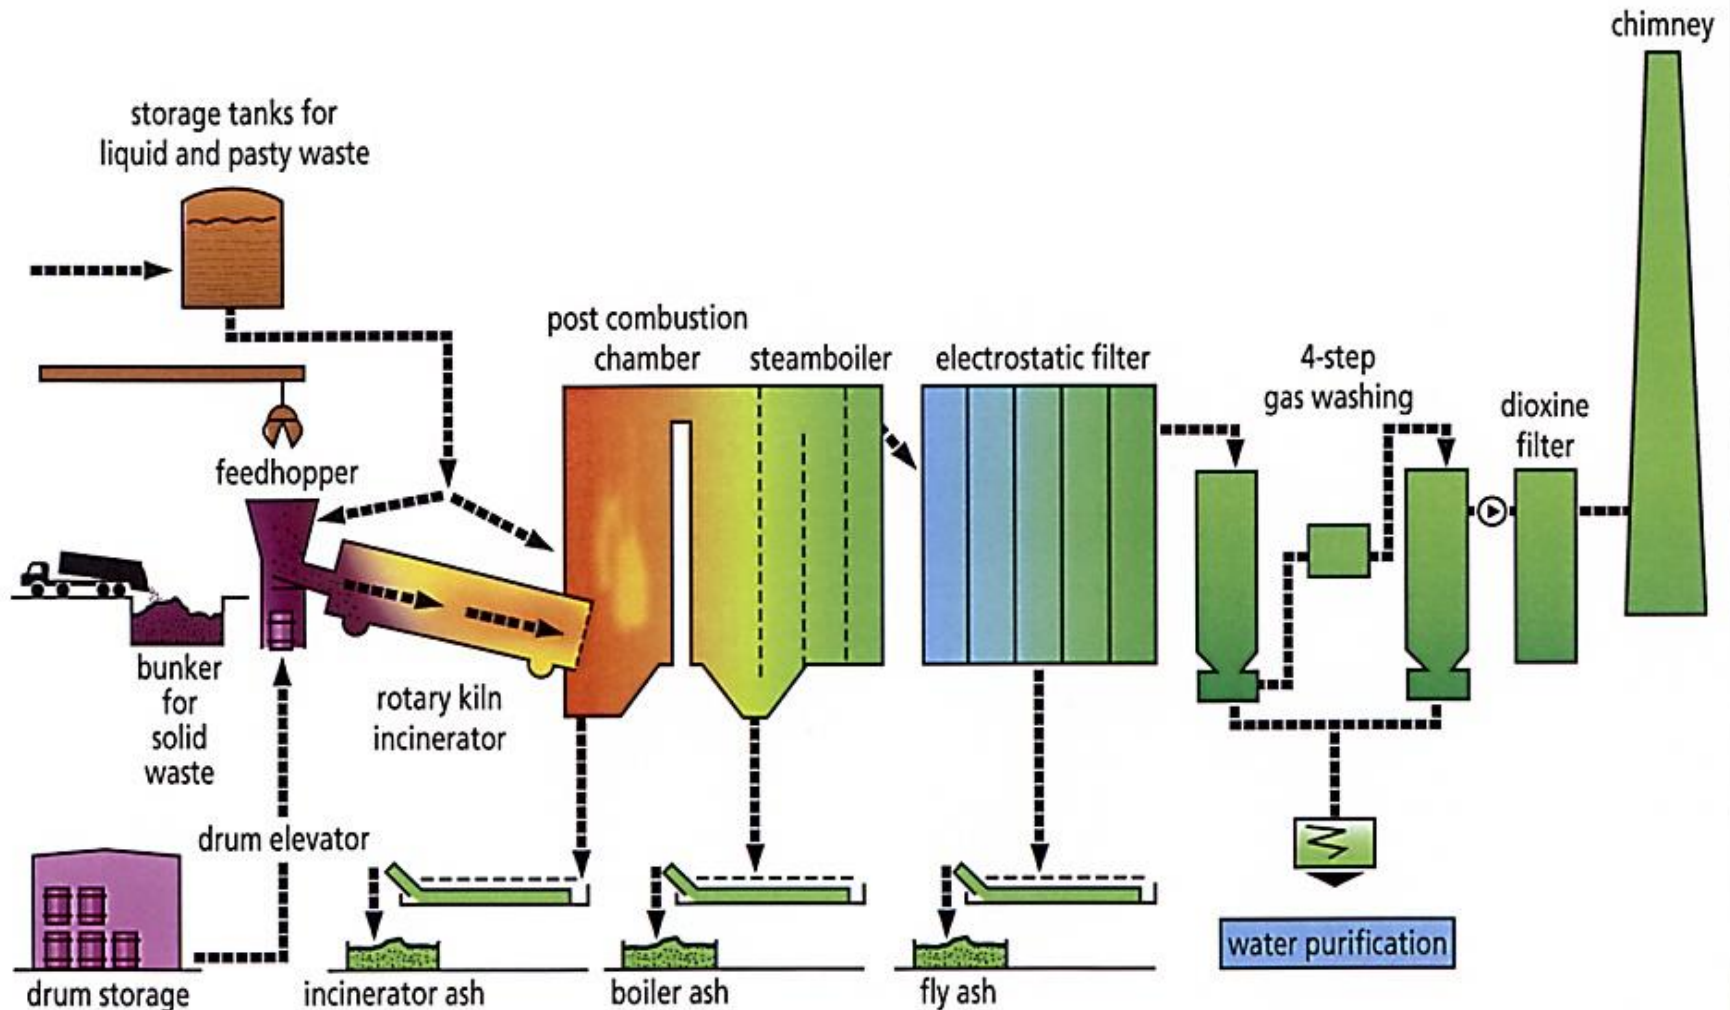

Schematic of rotary kiln waste-to-energy furnace

Energy Recovery from MSW

TABLE 8-12
Net heating value of various materials

Material	Net heating value (MJ/kg)
Charcoal	26.3
Coal, anthracite	25.8
Coal, bituminous (hi volatile B)	28.5
Fuel oil, no. 2 (home heating)	45.5
Fuel oil, no. 6 (bunker C)	42.5
Garbage	4.2
Gasoline (regular, 84 octane)	48.1
Methane ^a	55.5
Municipal solid waste (MSW)	10.5
Natural gas ^a	53.0
Newsprint	18.6
Refuse derived fuel (RDF)	18.3
Rubber	25.6
Sewage gas ^a	21.3 to 26.6
Sewage sludge (dry solids)	23.3
Trash	19.8
Wood, oak	13.3 to 19.3
Wood, pine	14.9 to 22.3

^aDensities taken as follows (all in kg/m³): CH₄ = 0.680; natural gas = 0.756; sewage gas = 1.05

INCINERATION

Dulong Equation:

Gross Calorific Value

W: weight %

$$= 8140*W_C + 34400*(W_H - W_O/8) - 0.12*W_N + 2220*W_S$$

(Kcal/Kg)

- ❖ Because the large amount of particulate matter generated in the combustion process,
 - Some type of *air pollution control device is required*.
 - Normally, *electrostatic precipitators (ESP)* are chosen.
- ❖ Bulk volume reduction in incinerators is about 90 percent.
 - Thus, about 10 percent of the material still *must be carried to a landfill (ash)*.



DISPOSAL BY SANITARY LANDFILL

- 1) Definition and importance
- 2) Landfill site selection
- 3) Site preparation
- 4) Landfill design
- 5) Landfilling operations
- 6) Environmental (Health & Pollution) Considerations
- 7) Landfilling in Jordan




DISPOSAL BY SANITARY LANDFILL

- ❑ The **sanitary landfill** is defined as a land disposal site employing an engineered method of disposing of solid wastes on land in a manner that minimizes environmental hazards.
- ❑ This is achieved by:
 - spreading the solid wastes to the smallest practical volume, and
 - applying & compacting *cover material* at the end of each day.
- ❑ Landfill is the most abundant and ultimate solution of solid waste disposal:

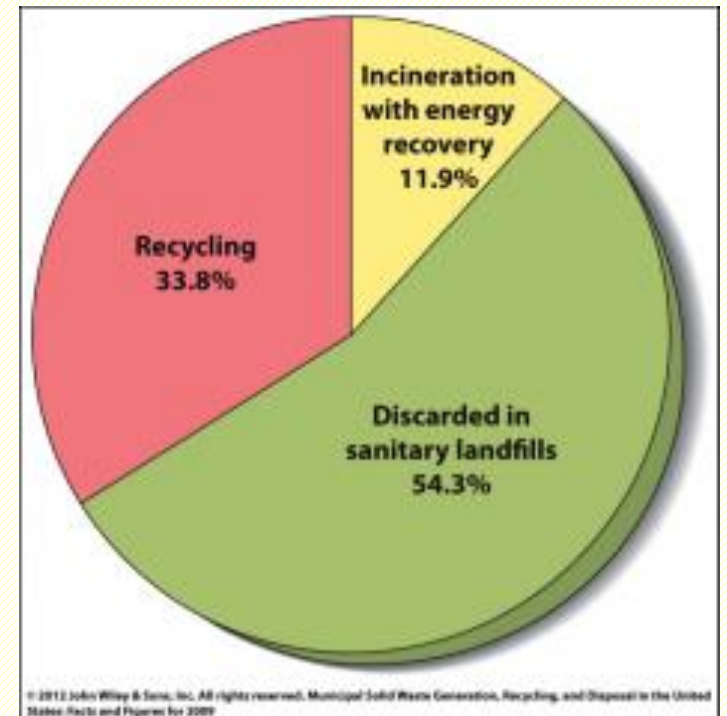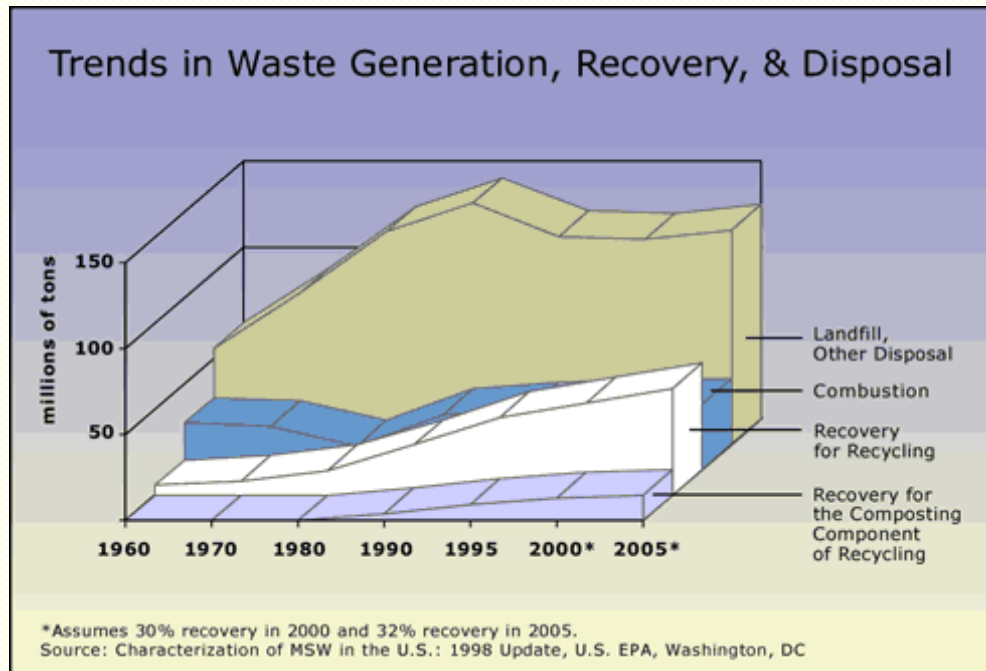

Site Selection Criteria and Factors

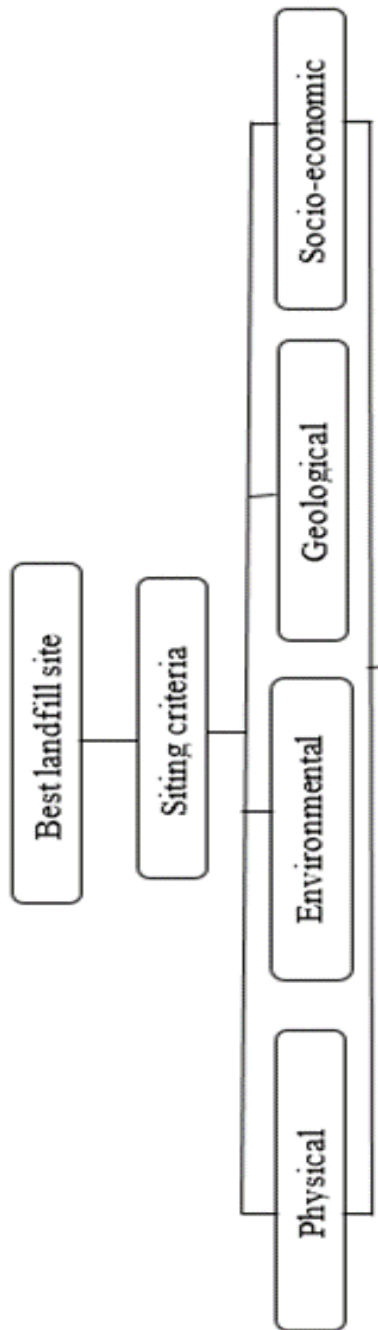

- Site location is perhaps the most difficult obstacle to overcome in the development of a sanitary landfill.
- Opposition by local citizens eliminates many potential sites / they are consulted during scoping session in the preparation of EIA study.
- In choosing a location for a landfill, consideration should be given to the factors below.
 1. Hydrology
 2. Availability of cover material
 3. Proximity of major roadways
 4. Haul distance (in time)
 5. Bridge capacities
 6. Traffic patterns and congestion
 7. Climate (for example, floods, mud slides, snow)
 8. Buffer areas around the site (for example, high trees on the site perimeter)
 9. Historic buildings, endangered species, wetlands, and similar environmental factors.

Site Preparation



- The plans, maps and specifications
- Operations: grading the site area, constructing access roads and fences, and installing signs, utilities & operating facilities.
- On-site access roads should be of all-weather construction and wide enough to permit two-way truck travel.
- All sanitary landfill sites should have electric, water, and sanitary services.
- Water should be available for drinking, fire-fighting, dust control, and sanitation.

SANITARY LANDFILL DESIGN


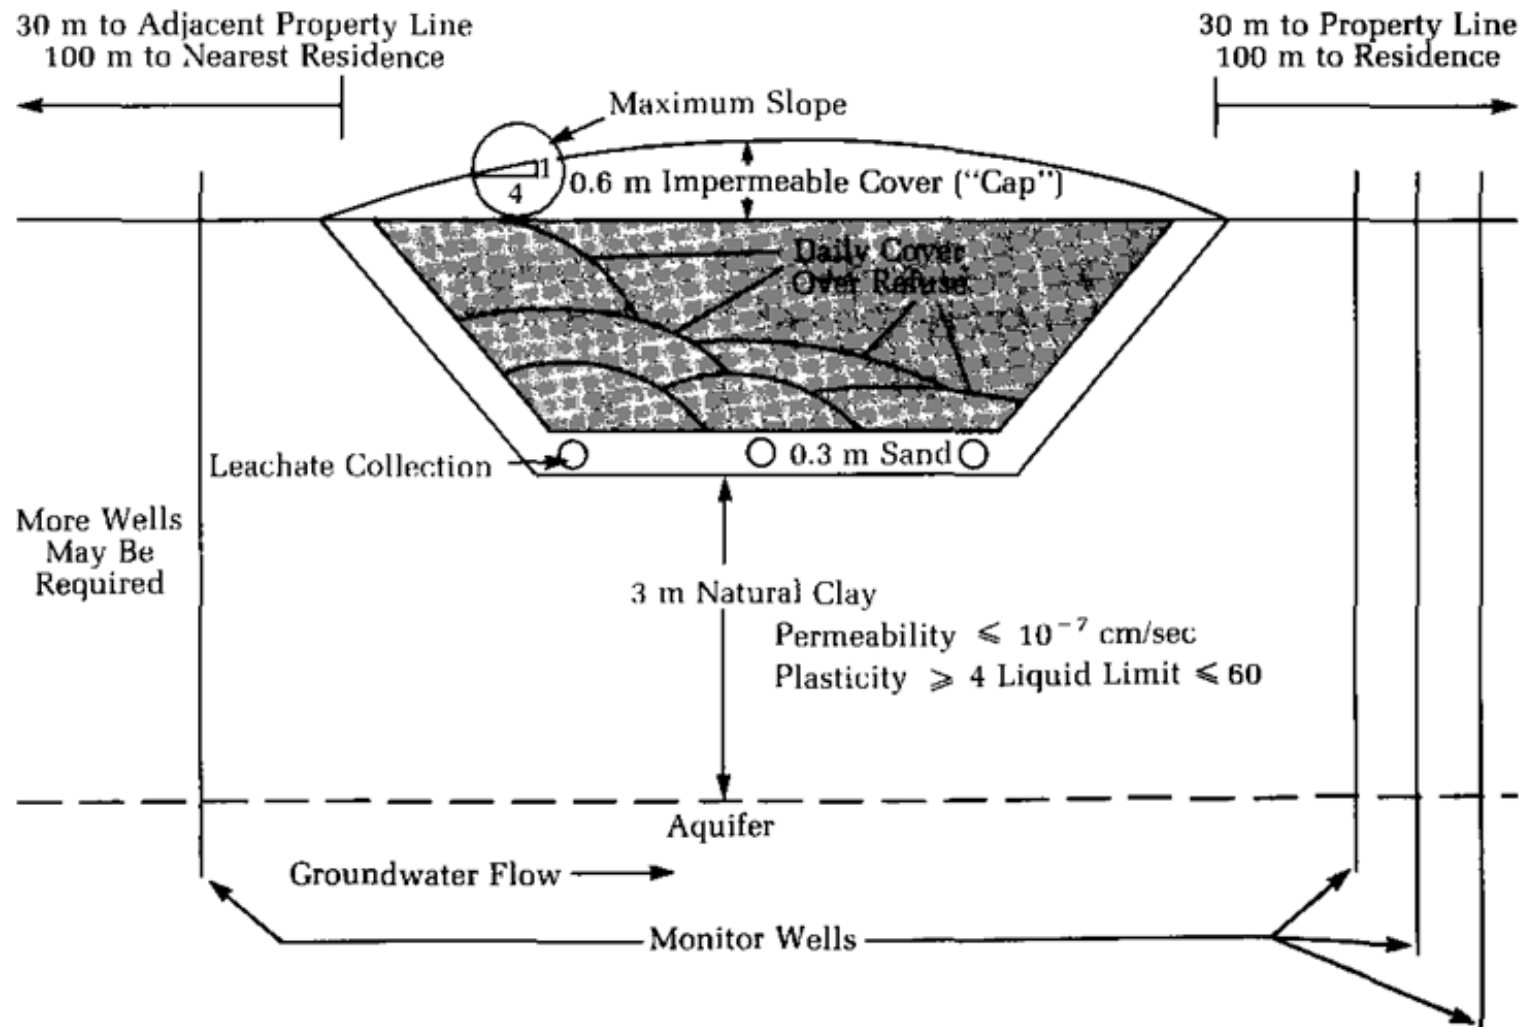


FIGURE 8-12

Municipal solid waste landfill, natural clay site. (Note: Drawing is not to scale; size of landfills may vary, and cover slope may exceed limit by approved design.) (Source: Michigan Department of Natural Resources.)

SANITARY LANDFILL DESIGN

Copyright © The McGraw-Hill Companies, Inc. Permission required for reproduction or display.

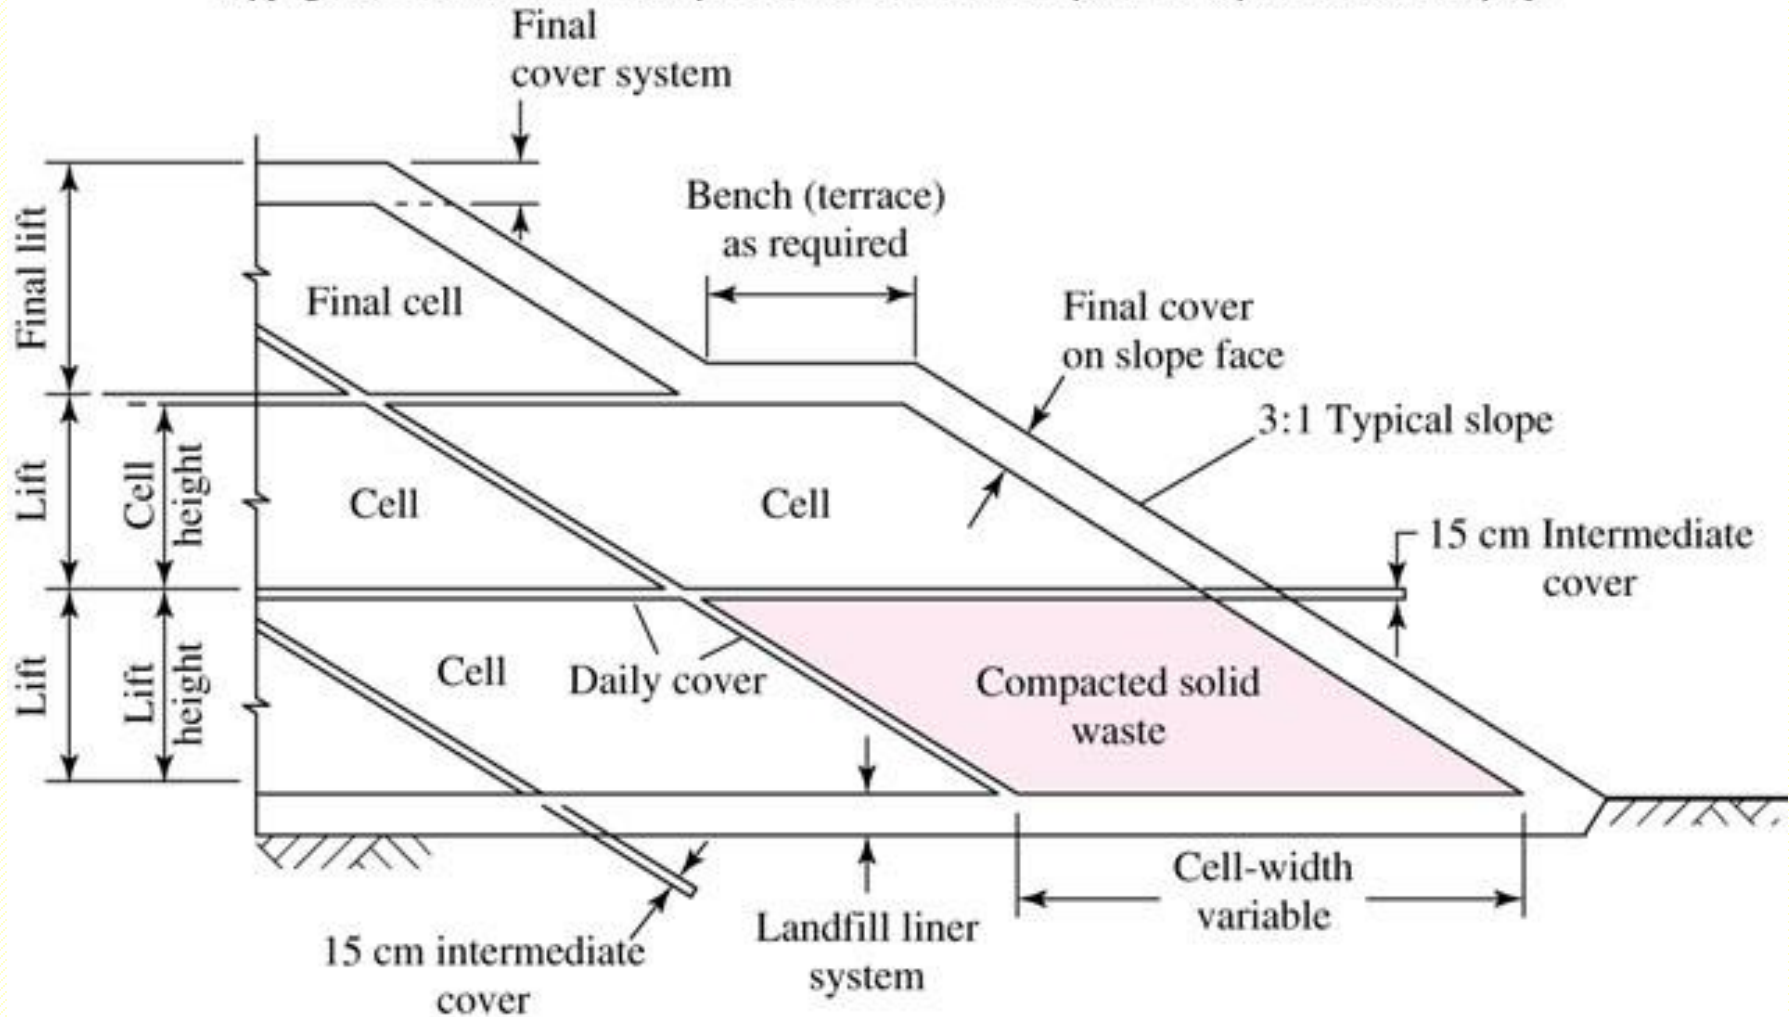

Landfilling Equipment

- ❑ A wide variety of equipment is available from which to select the proper type and size needed for an efficient operation.
- ❑ The size, type, and amount of equipment required at a sanitary landfill depends on:

- the size and method of operation,
- quantities and time of solid waste deliveries, and
- the experience and preference of the designer and equipment operators.
- the availability and dependability of service from the equipment.


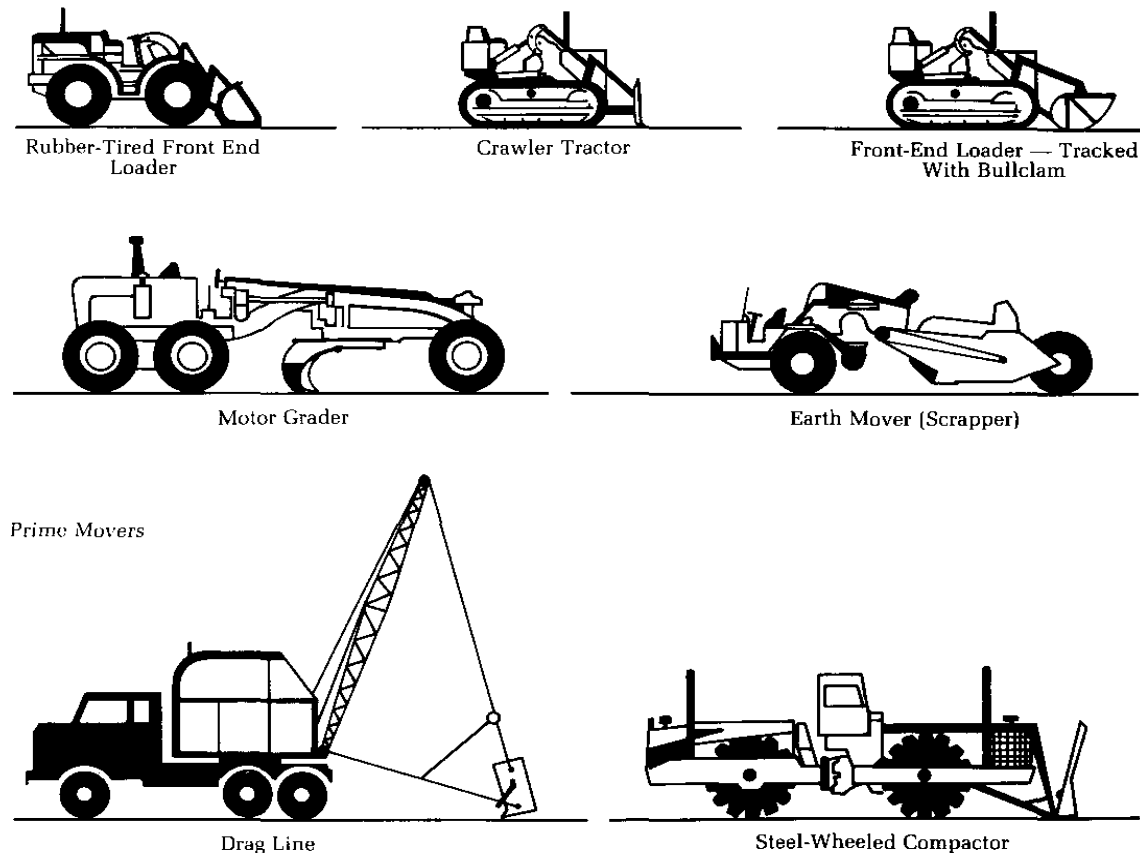


FIGURE 8-9
Sanitary landfill equipment.

Equipment

- ❑ The most common equipment used on sanitary landfills is the *crawler or rubber-tired tractor*
- ❑ The tractor can be used with a dozer blade, trash blade, or a front-end loader.
 - A tractor is versatile and can perform a variety of operations:
 - spreading, compacting, covering, trenching, and even hauling the cover material.
 - The decision on whether to select
 - *a rubber-tired or a crawler-type tractor, and a dozer blade, trash blade, or front-end loader*
 - must be based on the conditions at each individual site.

Landfilling Methods

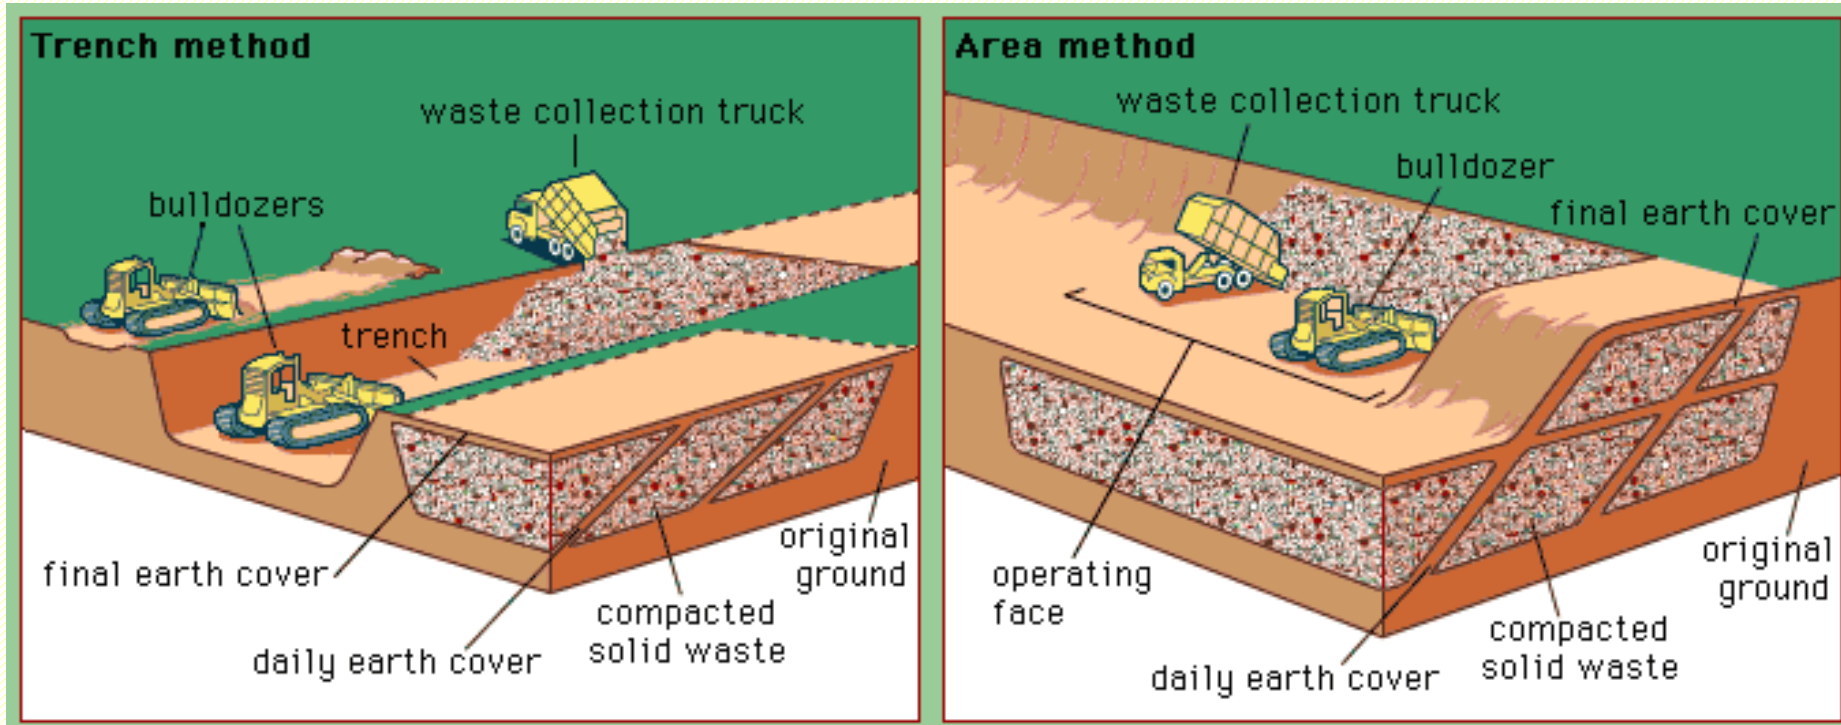

- Used on slightly sloping land.
- Excavation is done.
- Solid waste deposited on surface of land.
- Cover from on-site or off-site

Environmental Considerations

1. Vectors (carriers of disease),
2. Water and air pollution, should not be a problem in a properly operated and maintained landfill.

• ***Important factors in achieving insect, rodents and fire control:***

- A. well-compacted solid wastes
- B. well-compacted cover material (soil)
- C. good housekeeping, and
- D. timely (daily) covering of the solid waste.


Environmental Considerations

- Important factors in air pollution control:
 - A. Burning is never permitted at a sanitary landfill.
 - B. Accidental fires should be extinguished immediately using soil, water or suitable chemicals.
 - C. Odors can be controlled by:
 - covering the wastes quickly and carefully, and by
 - sealing any cracks that may develop in the cover.
 - D. Biogas control (*leak-proof collection, storage and use*).



Environmental Considerations: BIOGAS


- Principal gaseous products resulting from bacterial decomposition of waste are *methane, nitrogen, carbon dioxide, hydrogen, and hydrogen sulfide*.
- Studies indicate that during early years of landfill life, the predominating gas is *carbon dioxide*, while during later years the gas is composed almost equally of *carbon dioxide and methane*.
- Because methane is explosive, its movement must be controlled.
- Some landfills have been tapped with wells to collect the methane for local and commercial use as an *energy source*.

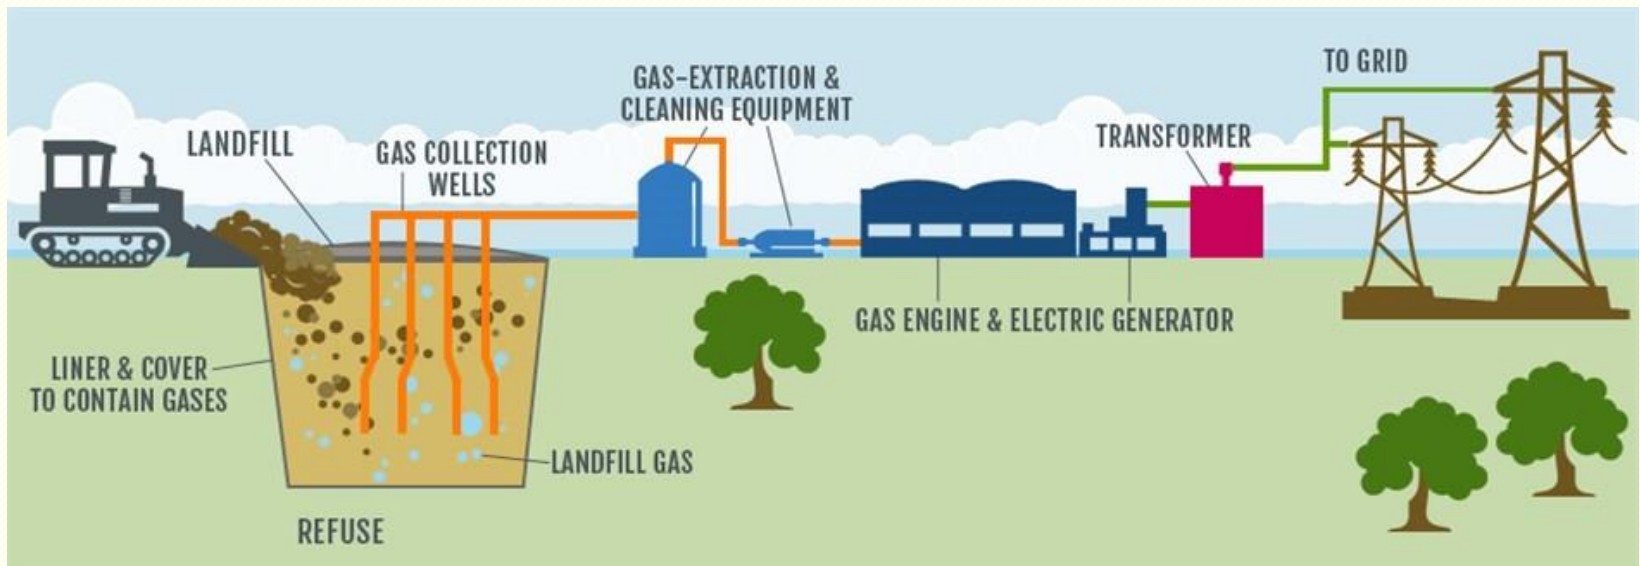

Leachate & its Control

Leachate:

Water that passes through the landfill carrying extracted dissolved and suspended matter.

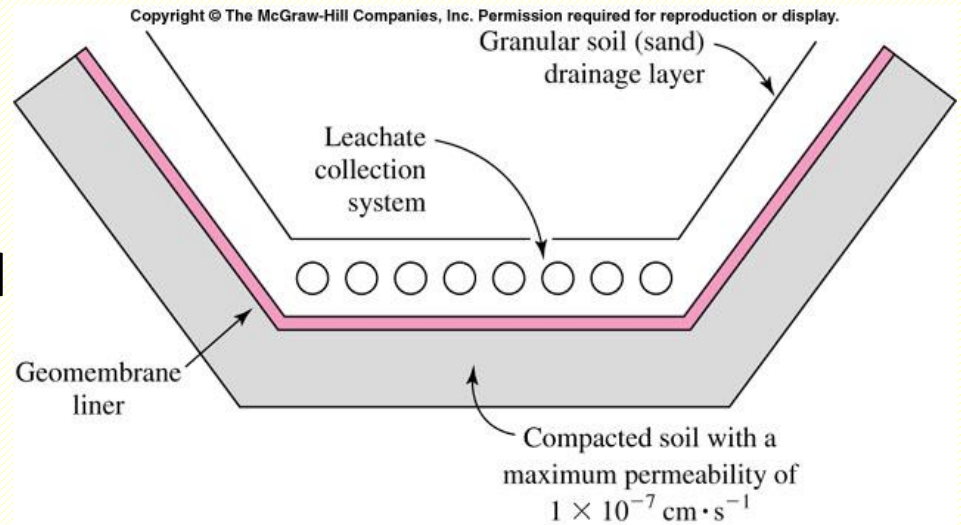

1. Solid wastes placed in a sanitary landfill may undergo a number of biological, chemical & physical changes.
2. Aerobic and anaerobic decomposition of the organic matter results in *both gaseous & liquid end products*.
 - ☐ Some materials are chemically oxidized.
 - ☐ Some solids are dissolved in water percolating through the fill.
3. Because of the differential heads (slope of the surface), the water containing those dissolved substances moves into the groundwater system.
4. The result is gross pollution of the groundwater.


Leachate & its Control

- Some of the more strict requirements for landfill leachate control include *several layers* to catch the leachate.
- *From top to bottom the layers are:*
 1. under-drain pipes
 2. plastic liner
 3. second layer of under drain pipes (in case the first liner leaks)
 4. second plastic liner
 5. impermeable clay
- Proper planning, site selection, and operating normally can *minimize* the possibility of surface and groundwater pollution.
- Some common preventive measures are
 1. Locating the site at a *safe distance* from streams, lakes & wells
 2. Avoiding site locations above *porous soil*
 3. Using an earth cover (soil) that is nearly *impervious*
 4. Providing suitable *drainage*

Leachate Composition


Parameter	Typical Range (milligrams per liter, unless otherwise noted)	Upper Limit (milligrams per liter, unless otherwise noted)
Total Alkalinity (as CaCO_3)	730–15,050	20,850
Calcium	240–2,330	4,080
Chloride	47–2,400	11,375
Magnesium	4–780	1,400
Sodium	85–3,800	7,700
Sulfate	20–730	1,826
Specific Conductance	2,000–8,000 $\mu\text{mhos cm}^{-1}$	9,000 $\mu\text{mhos cm}^{-1}$
TDS	1,000–20,000	55,000
COD	100–51,000	99,000
BOD	1,000–30,300	195,000
Iron	0.1–1,700	5,500
Total Nitrogen	2.6–945	1,416
Potassium	28–1,700	3,770
Chromium	0.5–1.0	5.6
Manganese	Below detection level – 400	1,400
Copper	0.1–9.0	9.9
Lead	Below detection level – 1.0	14.2
Nickel	0.1–1.0	7.5

SANITARY LANDFILL

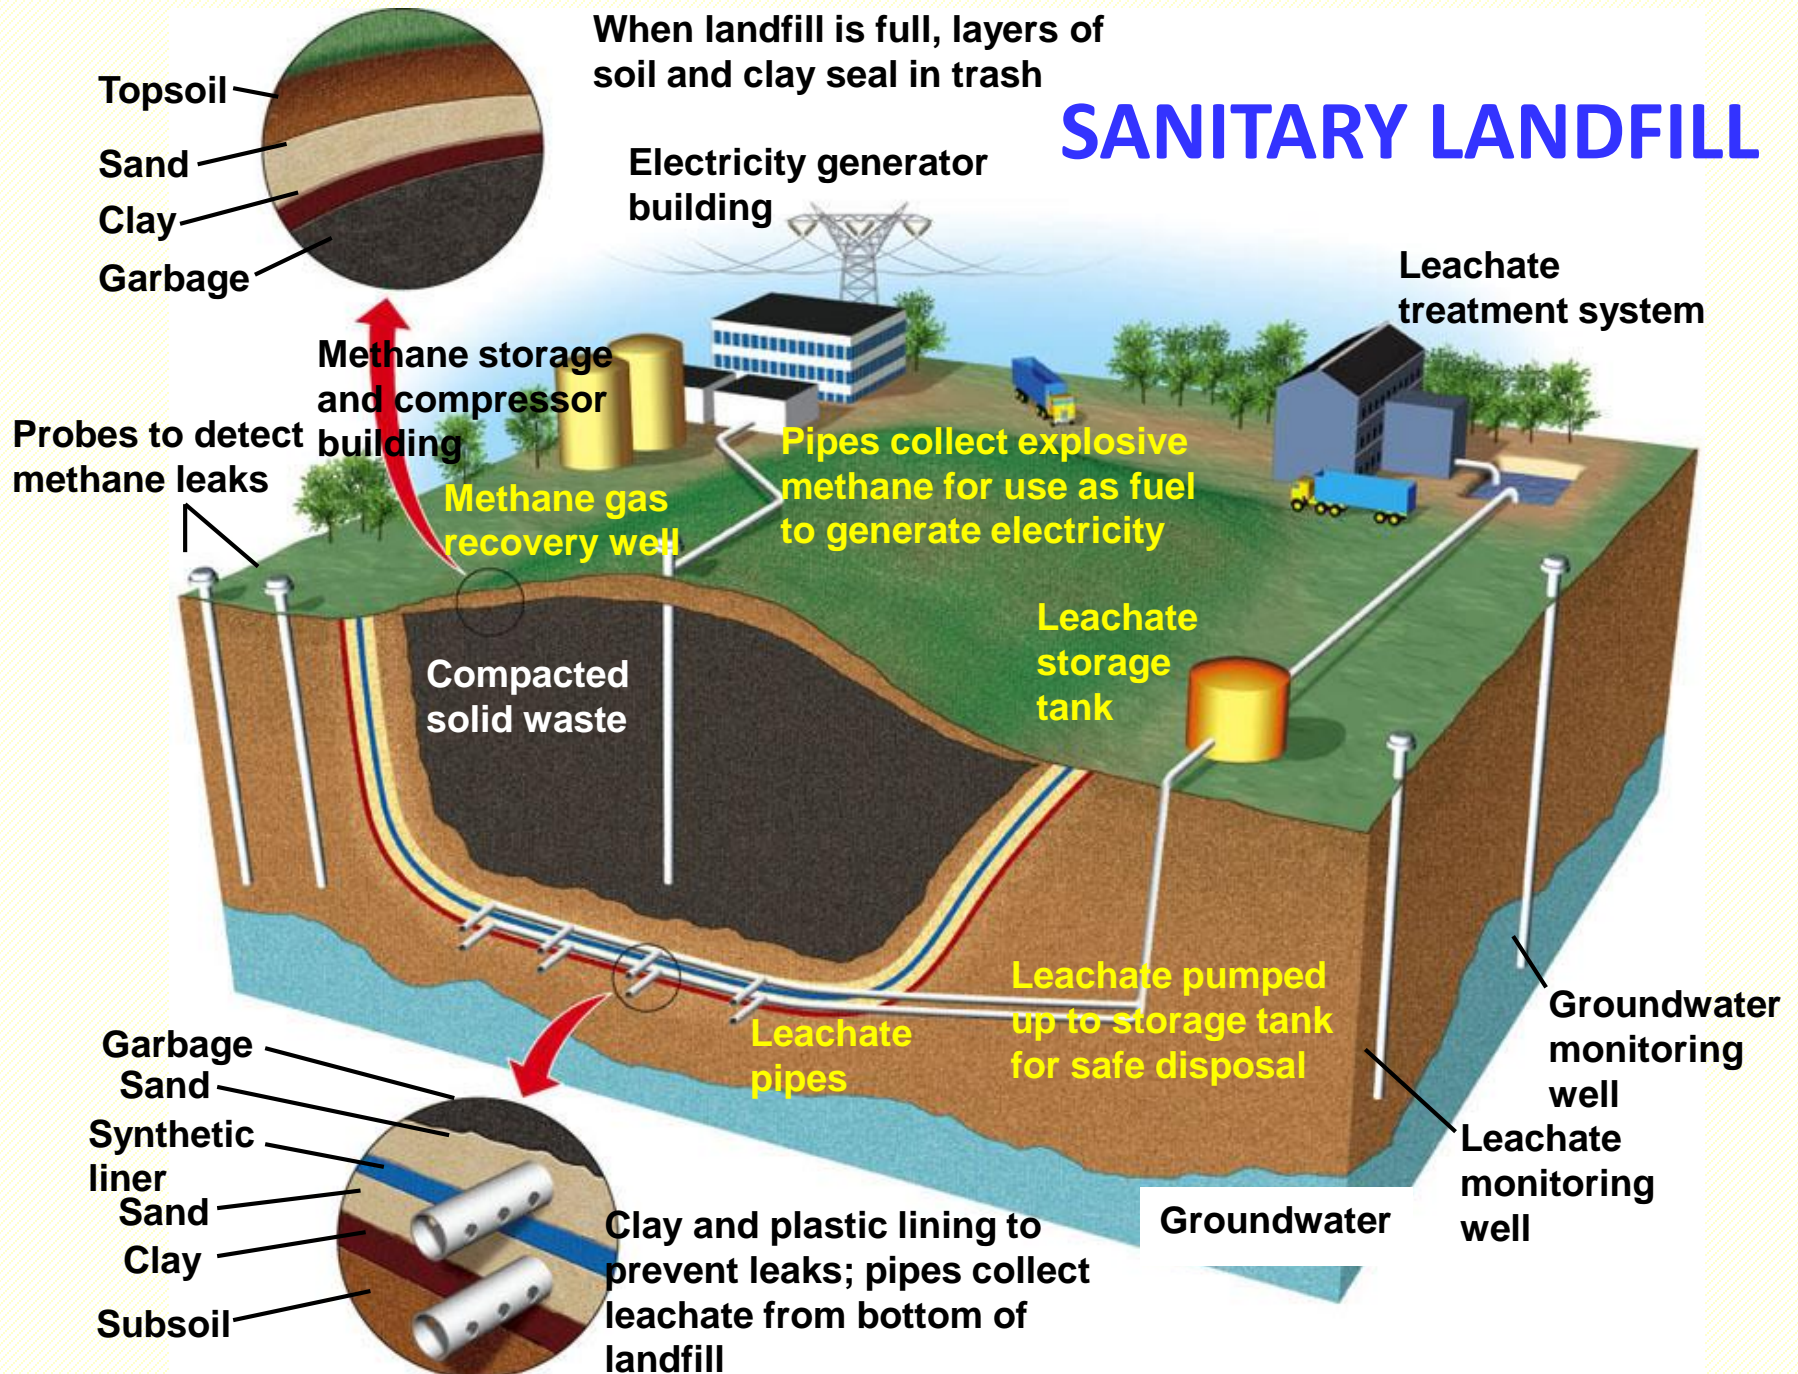

Solid waste Management in Jordan

Constituents of Municipal Solid Waste (MSW) in Jordan:

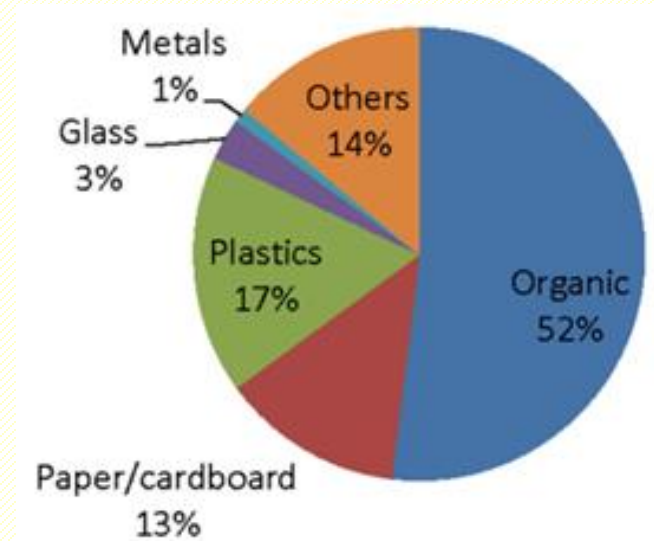

MSW Technical Performance

MSW Collection Coverage

In rural area	70 %
In urban area	90%


Composition of MSW by Generator (%)

Domestic and commercial	80%
Industrial	20%


Management of Waste (%) MSW Final destination

Composted	0%
Recycled	10%
Disposed in engineered landfills	50%
Disposed in controlled dumps	35%
Disposed in open dumps	5%

The daily estimated solid waste generated in 2011 was about 5,846 tons

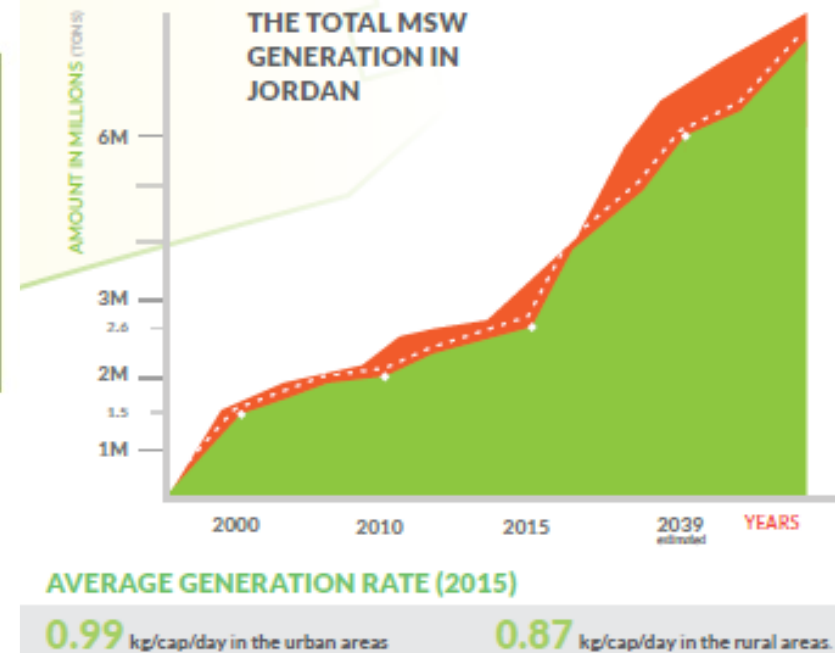

Solid Waste Responsibilities in Jordan

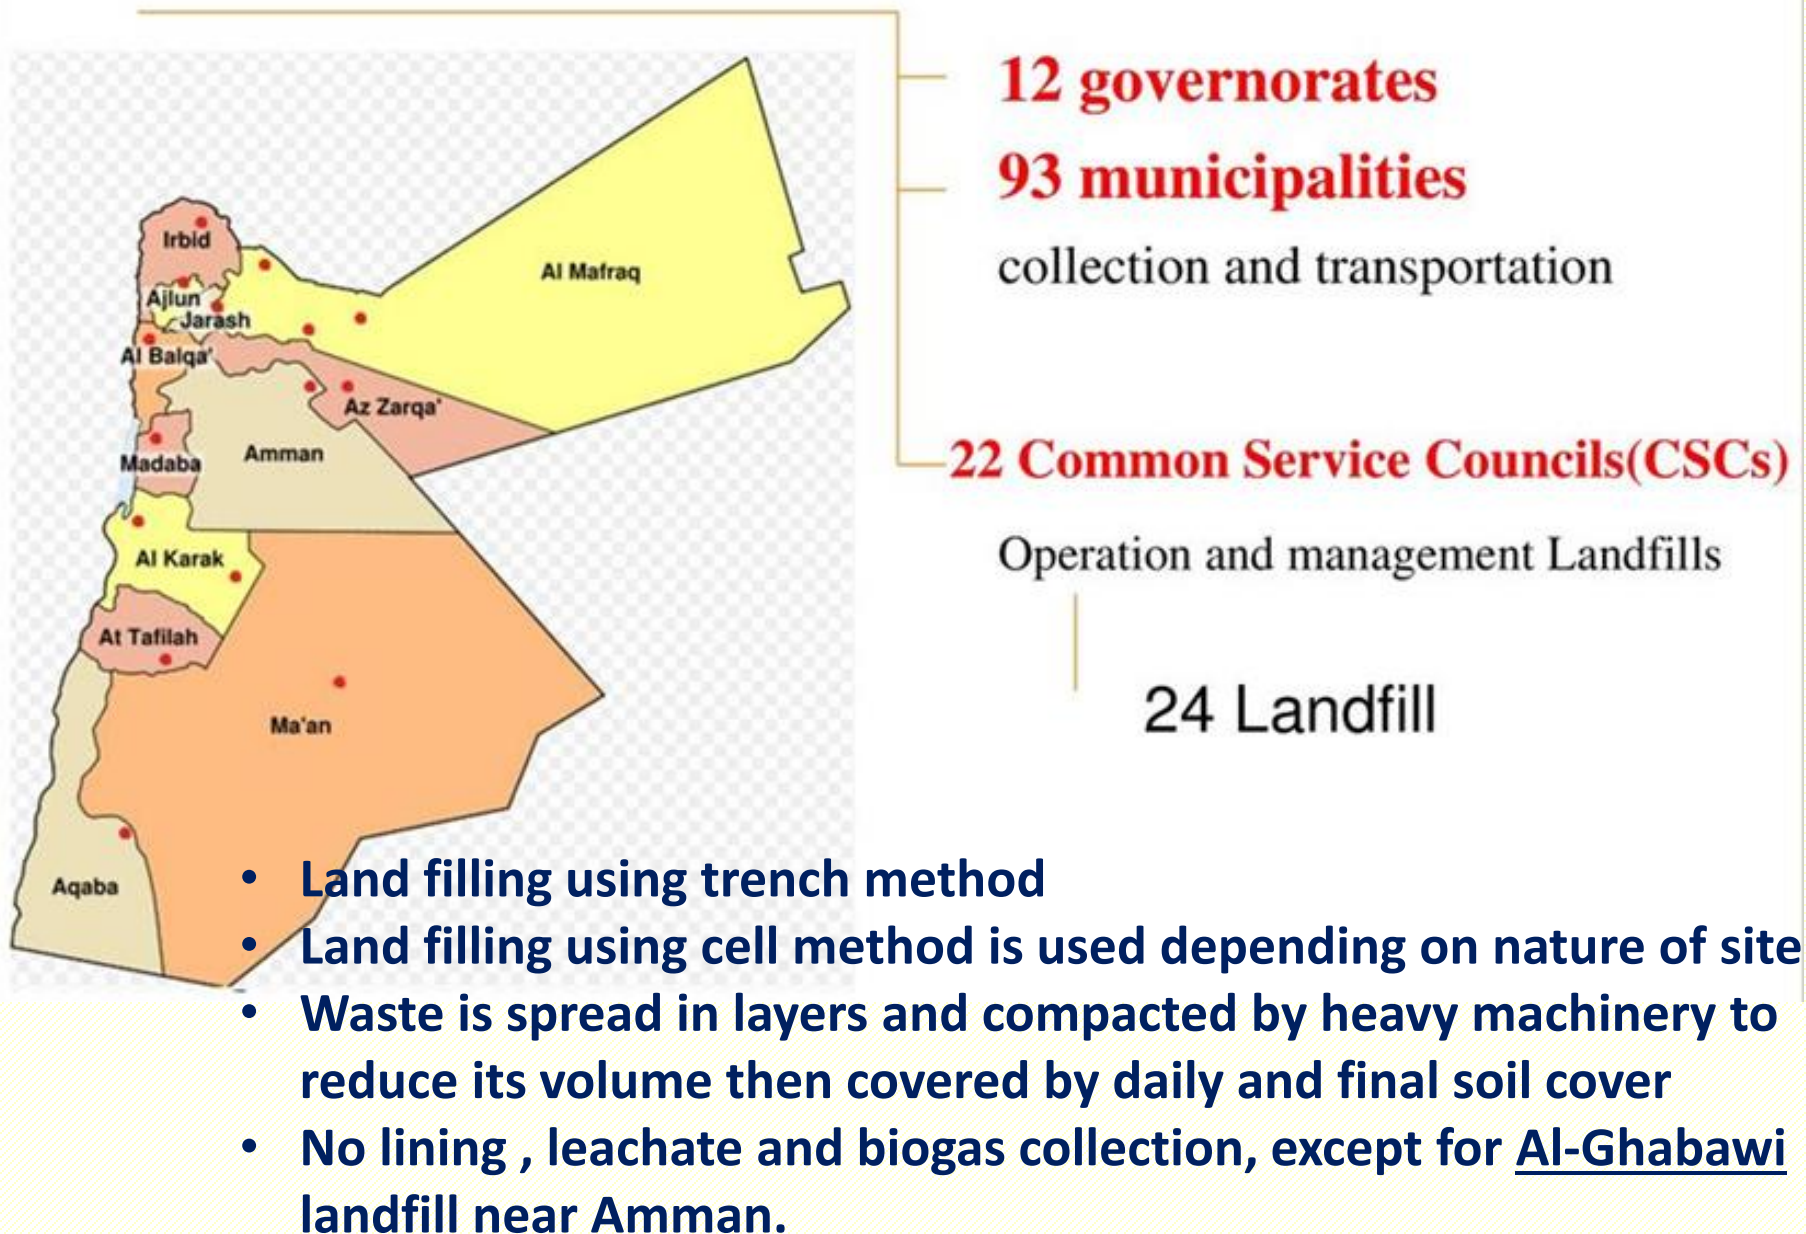

REFERENCES

1. Peavy, H.S.; D.R. Rowe and G. Tchobanoglous. Environmental Engineering, McGraw-Hill, 1985.
2. George Tchobanoglous and Frank Kreith. Handbook of Solid Waste Management, Second Edition, McGraw-Hill, 2nd Edition, 2002.
3. Cheremisinoff. Handbook of Solid Waste Management and Waste Minimization Technologies, 2005.
4. P.A.Vesilind, W.Worrell & Debra Reinhart. Solid Waste Engineering, 2002.