PHOSPHATE PART II

https://www.jpmc.com.jo/Default.aspx

Reference: Shreve's Book Ch. 10, pp. 244-261

Phosphoric Acid Production

- □ Metallic acid with the chemical formula of (H_3PO_4) , also called Orthophosphoric Acid.
- Orthophosphoric acid used in fertilizers industry.
- Diluted phosphoric acid of $(28\% P_2O_5)$ concentration are produced daily, depending on the type.
- By acidulation with Sulfuric Acid, Phosphate rock is converted to Phosphoric Acid and Gypsum is a by product.
- The phosphoric acid plant produces the following by products:

25% hexa fluorosilicic acid (H_2SiF_6) Gypsum, 25-30% free water.

Phosphoric Acid Production

Production

- Phosphate is moved by conveyor belts to Phosphate Crusher, where all particles are having the size of less than 500 micron.
- Powdered phosphate reacts with sulfuric acid in a reactor which produced diluted phosphoric acid and gypsum.

$$3Ca_3(PO_4)_2CaF_2+10H_2SO_4+20H_2O$$
 $\longrightarrow 6H_3PO_4+10CaSO_4.2H_2O+2HF$

The mixture is, then pumped to three incubators, in order to enlarge the gypsum crystals.

- The resulting solution is filtered, and the diluted phosphoric acid is sent to the acid storage, to be concentrated later.
- The resulting gases from the reaction, which include multiple fluoride compounds, water vapor, and acids, are washed by absorption towers before they are released to the atmosphere.


- Diluted phosphoric acid is concentrated in heat- exchangers from 28% to 52% in three concentration lines, using vacuum evaporation.
- During this concentration process HF reacts with silica (which is present in the rock in sufficient amounts) producing fluorosilicic acid (H₂SiF₆) in 22% concentration and water vapor.


$$6HF + SiO_2$$
 \longrightarrow $H_2SiF_6 + 2H_2O$

Purification to part of the acid is applied to have part of the final product for exporting as a final product; a minor part is sent to the local market.

Usages:

Phosphoric acid is an intermediate product for multiple industries such as fertilizers, animal feed, detergents, and some food industries.

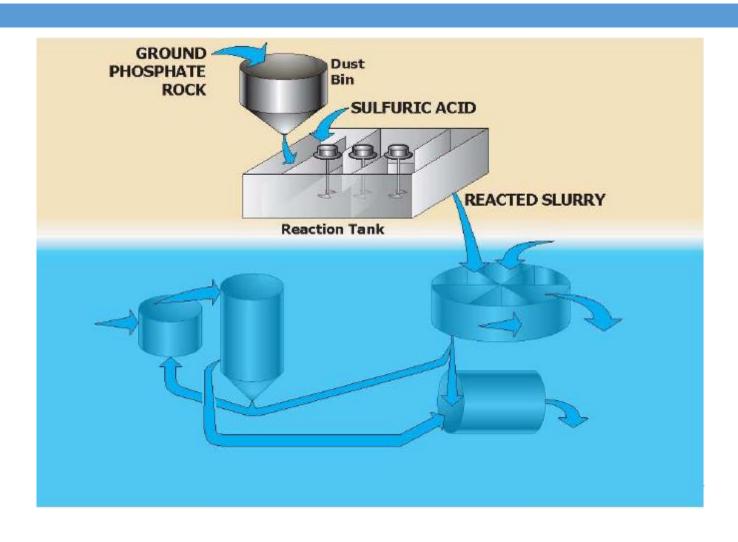

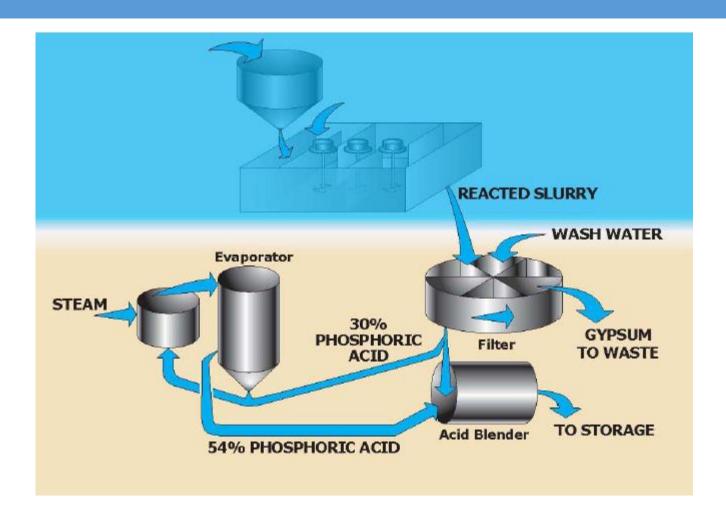

Environmental Hazards of H₃PO₄ Production

1. Solid waste

- □ Phosphogypsum (PG) is a waste byproduct produced by phosphoric acid, about 5 tones of PG are generated for every tone of phosphoric acid (H₃PO₄) produced.
- Some impurities naturally present in the phosphate rock become concentrated in (PG), including fluoride compounds, heavy metals such as lead and cadmium, radioactive elements and residual acidity.
- The continued accumulation of (PG) has created urgent pressures to find useful applications for this by-product.

Environmental Hazards of H₃PO₄ Production

2. Liquid waste

- The flouroslisic acid shall be supplied to produce aluminum fluoride.
- Off- grade flouroslisic acid shall be recycled to H₃PO₄ plant.
- Any remaining amount of off- grade flouroslisic acid will be neutralized with limestone to produce calcium silicate.

Environmental Hazards of H₃PO₄ Production 4

3. Emissions

- a. Major emissions from H₃PO₄ production include SiF4, HF, fluorine gas.
- These gases will be collected by ventilation system and the sent to scrubber.
- b. The secondary emission is dust originated from handling, grinding of phosphate rock.
- Dust collecting equipment will be installed.

- □ It is a strong metallic soluble acid at all concentrations, has a chemical formula H_2SO_4 .
- Sulfuric acid is produced in two units with 98.5% concentration, and a designed daily capacity of 2,500 tons for each unit.
- Sulfur used in producing sulfuric acid is imported from Arab neighboring countries, Iraq and Saudi Arabia, and from some foreign countries as Russia and Iran.
- Sulfur is stored in a storage facility of a capacity of 35,000 tons.



Production


- Sulfur is dragged from the stores by loaders and fed onto conveyor belts, where it gets melted in special pools by medium-pressure vapor, and adding some materials for purification.
- Lime was used to neutralize sulfur acidity before melting.
- Liquid sulfur is stored in a heat-insulated storage at a temperature of 135 °C.
- Liquid sulfur is pumped into a kiln at a temperature of 1000 °C, where it is burnt with the presence of dry atmospheric air to be transformed into sulfur dioxide in the state of gas.
- As that chemical reaction is an exothermal one, the released temperature is then used in producing high pressure steam (at 46 atm), which conveyed to the Facilities Unit.

- □ Sulfur dioxide, cooled to (425°C) and passed in the state of gas into a four-stage reactor containing Vanadium oxide (V_2O_5) as a catalyst, where it is transformed into sulfur trioxide (SO_3) .
- □ That gas is then directed to absorption towers where it reacts with water producing sulfuric acid at a concentration of 98.5%, then, cooled down and stored in two tanks.

Usages:

 Sulfuric acid is used in various industries such as water treatment, batteries, and as a solvent in various industries.
It is also used in producing phosphoric acid.



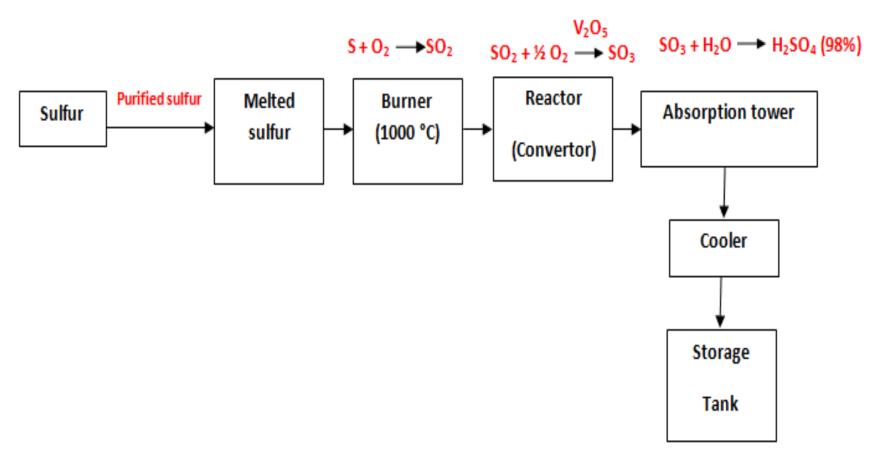

Sulfuric acid production process

Environmental Hazards of H₂SO₄ Production

1. Solid waste

- A. Spent V_2O_5 should be carefully dealt since is considered as hazardous material.
- The spent catalyst is sealed in steel or plastic containers and stocked in old mines.
- B. Sulfur generated from filtration process(filter cake).
- This waste will be mixed with gypsum and disposed in the gypsum disposal area.

Environmental Hazards of H₂SO₄ Production

2. Emissions

- \square SO₂ emissions may be originate from bad conversion of SO₂ to SO₃.
- SO₃ emissions may be originate from bad absorption efficiency.
- \square H₂SO₄ emissions may be originate from mist formation.

Aluminum Fluoride Production

Production

- Aluminum fluoride is produced from fluorosilicic acid coming as waste product from the phosphoric acid plant and Aluminum hydroxide, which is imported from abroad.
- The unit includes the follow steps: $AI(OH)_3$ handling and drying, fluorosilicic acid (H_2SiF_6) heating, reaction, silica filtration, AIF_3 crystallization, filtration, drying, and bagging.

Aluminum Fluoride Production

- By the completion of the reaction, the resulting mixture would be consisting of the solvent aluminum fluoride, and silica sand.
- Sand is then removed by a filtration belt, and disposed onto the belt carrying gypsum from the Phosphoric Acid Unit.
- Aluminum fluoride solution is then sent to 16 crystallizers to be separated by a filtration belt, dried through roasting in special equipment using burnt diesel, and packed according to demand in 25 kg, 50 kg, or 75 kg bags as demanded.

Usages:

Aluminum fluoride is used in extracting Aluminum from its ores by lowering the melting point in the electrical cells during the manufacturing process.

Environmental Hazards of Aluminum fluoride Production



 Environmental features were installed in most important areas to minimize dust emissions and recycle product (like cyclone and bag filters, and scrubbers).