


Condensation

Phase change heat transfer
problems

Condensation _ Types and Mechanism

- Condensation **occurs when the temperature of the vapor is reduced below its saturation temperature.**
- **The solid surface whose temperature is below the saturation temperature of the vapor**
- **Two distinct forms of condensation:**
 - Filmwise condensation
 - Dropwise condensation

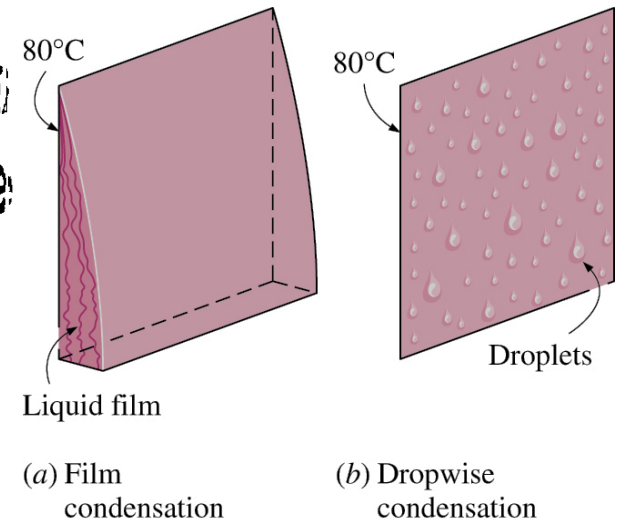


Film-wise Condensation

- When liquid formed by condensation wets the surface. It is a more common type of condensation to occur.
- In filmwise condensation liquid condensate forms a continuous film over the surface, this film flows down the surface under the action of gravity, shear force due to vapor flow, or other forces.
- The layer of liquid condensate acts as a barrier to heat flow due to its very low thermal conductivity and hence low heat transfer rate.

Dropwise condensation

- Dropwise condensation takes place when the liquid condensate does not wet the solid surface.
- The condensate does not spread, but forms separate drops.
- These drops in turn coalesce to form large drops and sweeping clean a portion of the surface, where again new droplets are generated.
- The average heat transfer coefficient for dropwise condensation is much higher than filmwise condensation.


Filmwise and dropwise Condensation

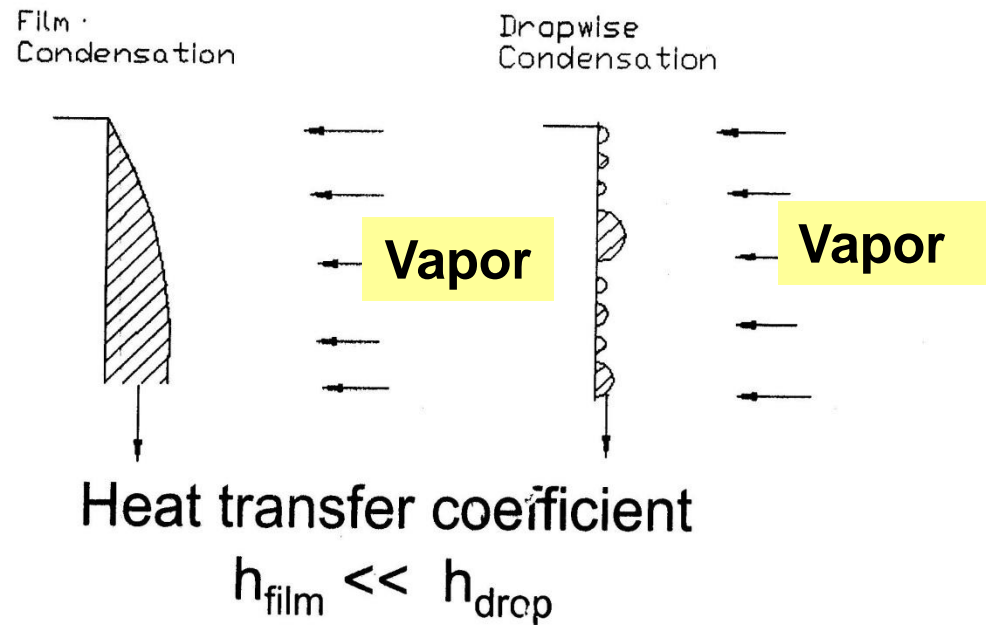

Filmwise Condensation: Nusselt Analysis



Idealizations:

- Laminar flow
- Constant properties
- Negligible subcooling of liquid
- Inertia effects negligible in momentum balance
- Vapor stationary, no drag
- Smooth liq-vap interface
- Heat transfer across film by conduction only

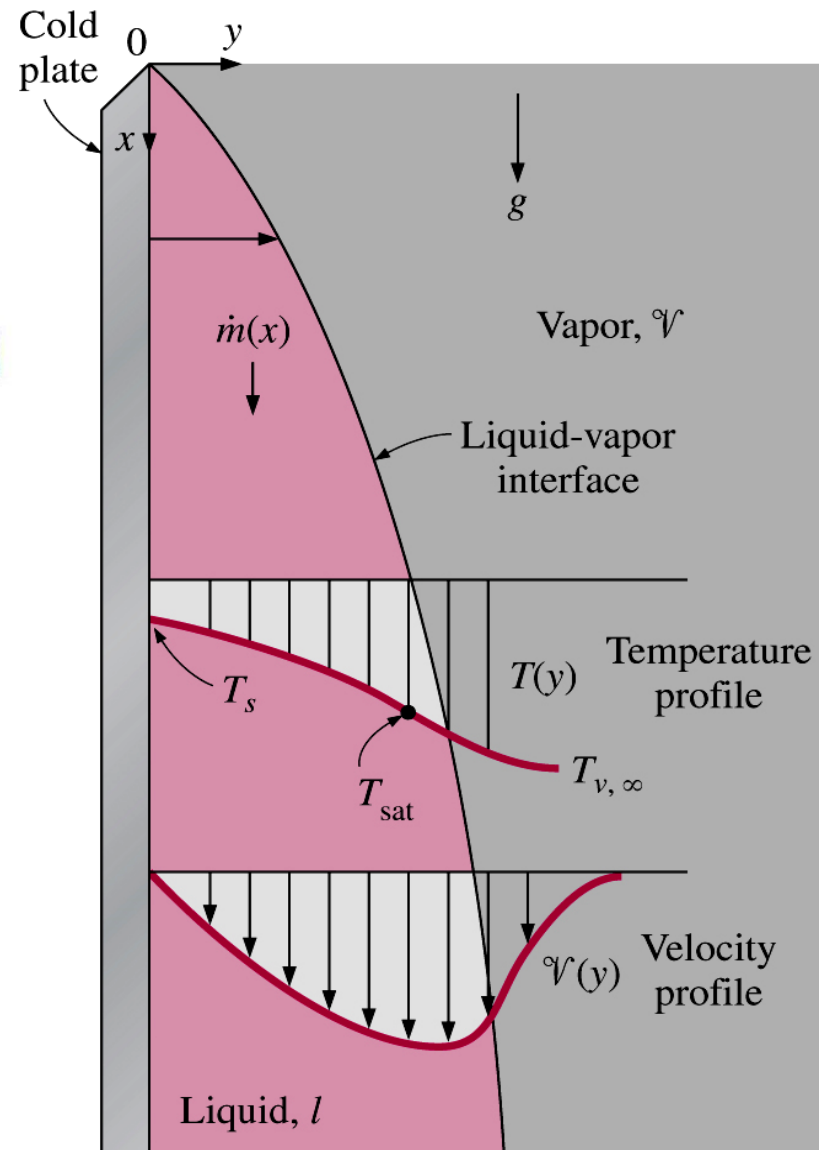

Laminar Film Condensation

- Vertical Flat surface**

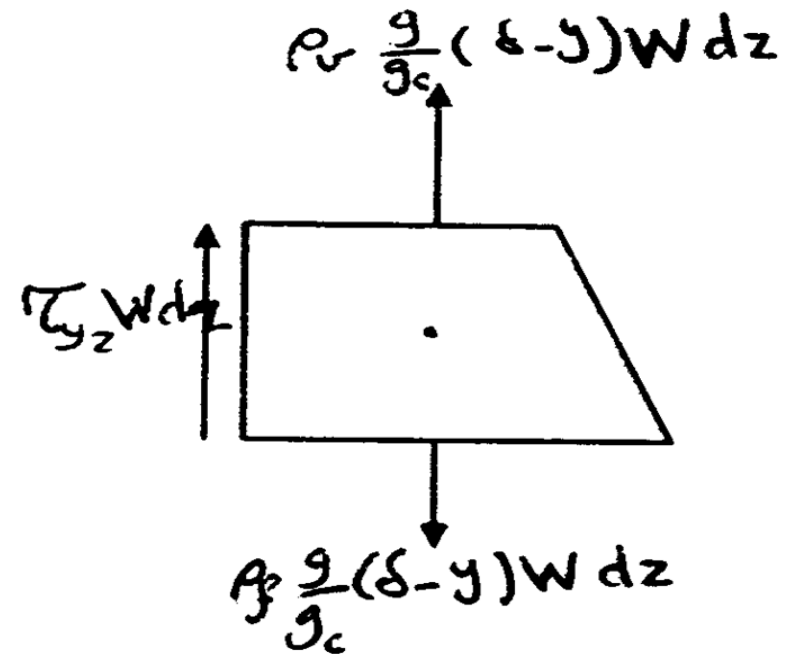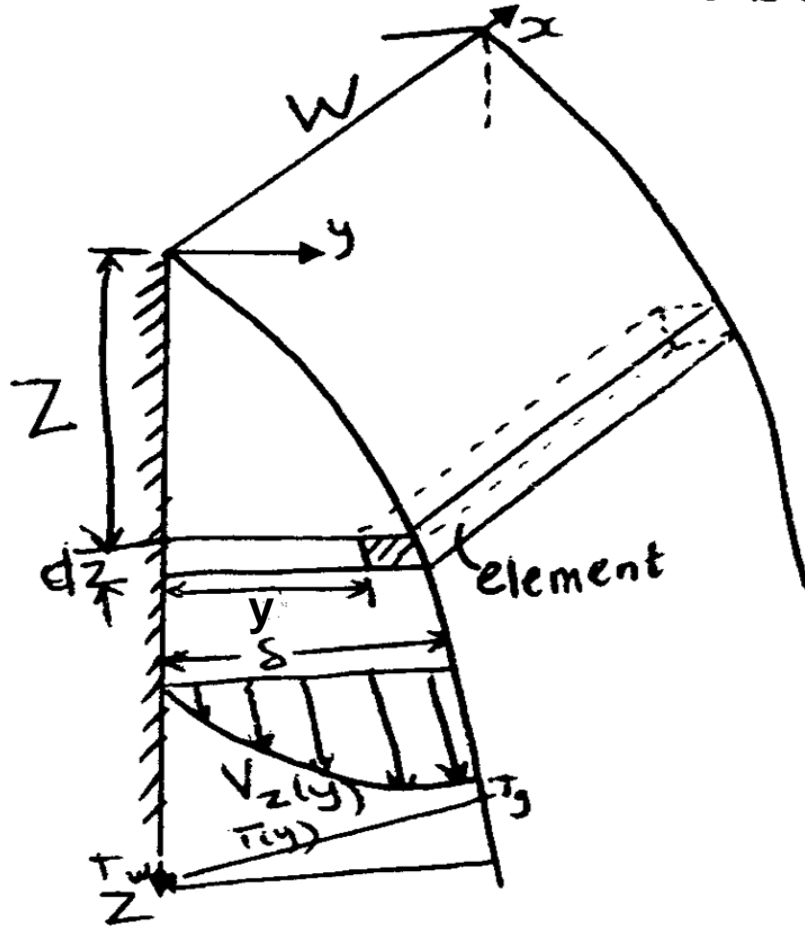

2-dimension

Definitions

Film thickness = δ at any z location

Width of the plate = W

Vol of element = $(\delta - y) W dz$

Types of forces acting on element

- 1. gravity force “+ve downward”**
- 2. buoyancy force “-ve”**
- 3. friction due to viscosity “-ve”**

Force Balance on Element

- **Gravity Force = Buoyancy + Friction**

$$\rho_f \frac{g}{g_c} (\delta - y) W dz = \rho_v \frac{g}{g_c} (\delta - y) W dz + \tau_{yz} (W dz) \quad (1)$$

T_g is the sat. temp. may be $<$ ambient temp “ T_∞ ” or = ambient temp “ T_∞ ”

Since $\tau_{yz} = \mu \frac{dV_z}{dy}$. Substitute in eq. 1

and rearranging

$$\frac{dV_z}{dy} = \frac{g}{\mu g_c} (\delta - y)(\rho_f - \rho_v)$$

Integrating gives


$$V_z = \frac{g}{\mu g_c} (\rho_f - \rho_v) (\delta y - y^2/2) + C_1$$

$$\text{B.C } y=0, V_z=0 \therefore C_1=0$$

$$\therefore \text{velocity Profile } V_z = \frac{\delta^2 g}{\nu_f} (1 - \rho_v / \rho_f) (y / \delta - y^2 / 2\delta^2) \quad (2)$$

Note

Eq. 2 can be integrated over the cross section 'normal to the direction of the Z-directed velocity V_z ' to get the mass flow rate of condensate, \dot{m}_f

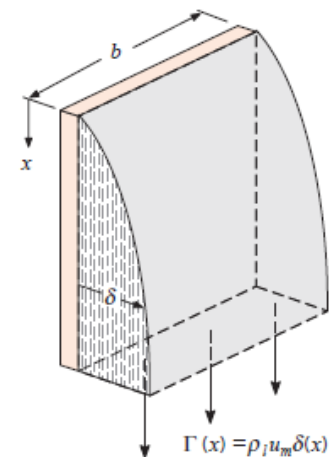

$$\therefore \dot{m}_f = \iint \rho_f v_z dA$$

$$= \int_0^w \int_0^b \frac{\rho_f g}{\gamma_f} \left(1 - \frac{\rho_v}{\rho_f}\right) \left(\delta y - \frac{y^2}{2}\right) dy dx$$

$$= \frac{w \delta^3 g \rho_f}{3 \gamma_f} \left(1 - \frac{\rho_v}{\rho_f}\right) \dots\dots\dots (3)$$

Heat transfer equation

The heat flow at the wall within the area $W dz$ is given by

$$q_y = -k_f (W dz) \frac{dT}{dy} \Big|_{y=0}$$

Assume a linear temp. profile within the film varies from T_w at the wall to T_g , the saturation temp. at the liq-vap interface.

$$q_y = -k_f W dz \frac{T_w - T_g}{\delta}$$

The amount of condensate bet.
 z and $z+dz$ is given by

$$\begin{aligned} \text{Added Condensate} &= m_f|_{z+dz} - m_f|_z \\ \text{in } dz \\ \text{condensate in } \frac{dz}{dz} &= \frac{dm_f}{dz} dz = \frac{dm_f}{d\delta} \cdot \frac{d\delta}{dz} dz \\ &= \frac{dm_f}{d\delta} \cdot d\delta \end{aligned}$$

from eq. 3

$$\frac{dm_f}{d\delta} \cdot d\delta = \frac{w_f \delta^2 g}{\gamma_f} (1 - P_{y_f}) d\delta \dots\dots (4)$$

Multiplying eq.4 by h_{fg} gives q_y

$$\frac{W \rho_f \delta^2 g}{\nu_f} \left(1 - \frac{P_v}{P_f}\right) h_{fg} d\delta = k_f W dz \frac{T_g - T_w}{\delta}$$

OR

$$\delta^3 d\delta = \frac{k_f \nu_f (T_g - T_w)}{\rho_f g h_{fg} (1 - P_v/P_f)} dz$$

Integrating

$$\delta^4 = \frac{4 k_f \nu_f Z (T_g - T_w)}{\rho_f g h_{fg} (1 - P/P_f)} + C_1$$

B.C at $Z=0$, $\delta=0 \therefore C_1=0$

$$\therefore \delta = \left[\frac{4 k_f \nu_f Z (T_g - T_w)}{\rho_f g h_{fg} (1 - P/P_f)} \right]^{1/4}$$

----- (5)

Express H. transfer in terms of Local conv. coeff. " h_z "

$$\text{OR } h_z \, w \, dz (T_w - T_g) = -k_f \, w \, dz \frac{T_g - T_w}{\delta}$$

$$h_z = k_f / \delta$$

Substituting in eq. (5)

$$h_z = k_f \left[\frac{\rho_f g h_{fg} (1 - \rho_v / \rho_f)}{4 k_f \nu_f Z (T_g - T_w)} \right]^{1/4} \dots\dots (6)$$

The Local Nusselt No is

$$Nu_z = \frac{h_z Z}{k_f} = \left[\frac{\rho_f g Z^3 h_{fg} (1 - \rho_v / \rho_f)}{4 k_f \nu_f (T_g - T_w)} \right]^{1/4} \dots\dots (7)$$

Average Coeff. over the entire surface

$$\bar{h} = \frac{1}{LW} \int_0^W \int_0^L h_z dz dx$$

$$= \frac{1}{L} \int_0^L k_f \left[\frac{\rho_f g h_{fg} (1 - \rho_v/\rho_f)}{4 k_f \nu_f L (T_g - T_w)} \right]^{1/4} dz$$

Solving, we get

$$\bar{h} = \frac{4}{3} k_f \left[\frac{\rho_f g h_{fg} (1 - \rho_v/\rho_f)}{4 k_f \nu_f L (T_g - T_w)} \right]^{1/4} = \frac{4}{3} h_L \dots (8)$$

$$= 0.943 \left[\frac{\rho_f k_f^3 h_{fg} (1 - \rho_v/\rho_f)}{\nu_f L (T_g - T_w)} \right]^{1/4} \dots (8)$$

Nu based on the average coeff.


$$Nu = \frac{\bar{h} L}{k_f} = \frac{4}{3} \left[\frac{\rho_f g h_{fg} (1 - \rho_v/\rho_f) L^3}{4 k_f \nu_f (T_g - T_w)} \right]^{1/4} \dots (9)$$

$$\therefore Re = \frac{v D_h}{\nu_f}$$


$$\therefore Re = \frac{v (4\delta)}{\nu_f}$$

$$= \frac{\dot{m}_f}{\rho_f A} \cdot \frac{4\delta}{\nu_f} = \frac{4 \dot{m}}{\rho_f (\delta W)} \frac{\delta}{\nu_f} = \frac{4 \dot{m}}{W \rho_f \nu_f}$$


for laminar flow $Re \leq 1800$... (19)

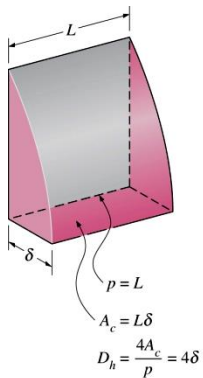

(a) Vertical plate




(b) Vertical cylinder



(c) Horizontal cylinder

The wetted perimeter p , the condensate cross-sectional area A_c , and the hydraulic diameter D_h for some geometries

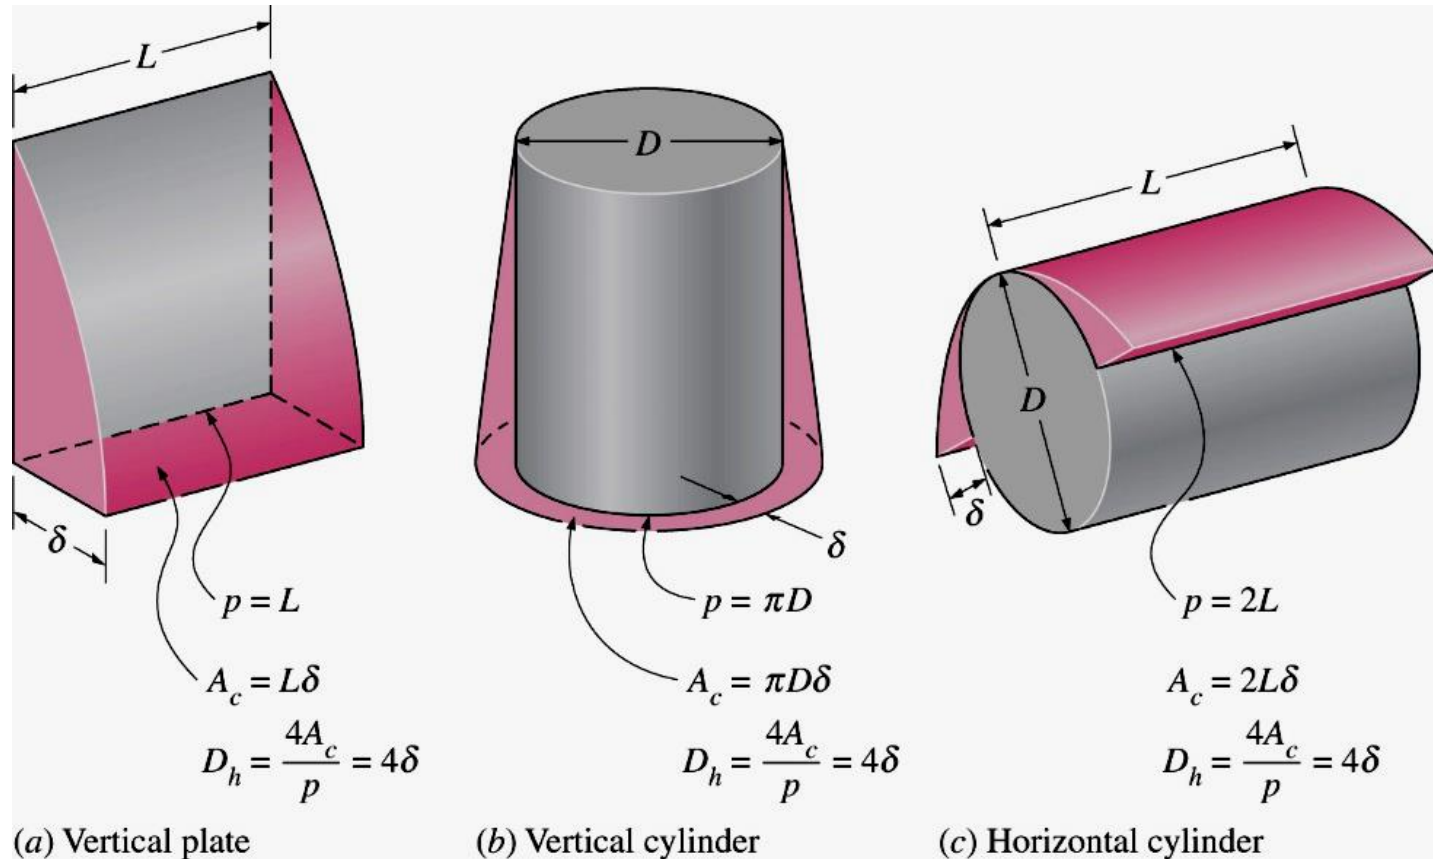

Note 1

Re can be written in terms of conv. coef

$$\therefore Q = h_L A_s (T_g - T_w) \dots \dots \dots (11)$$

where

A_s : Surface area of plate in contact with the film

but

$$Q = \dot{m}_f h_{fg}$$

$$\therefore \dot{m}_f = \frac{h_L A_s (T_g - T_w)}{h_{fg}} \dots \dots \dots (12)$$

Substituting h_{fg} into eq. (10)

$$\therefore Re = \frac{4 h_L A_s (T_g - T_w)}{W h_{fg} \rho_f \nu_f} \dots \dots \dots (13)$$

Note 2

- Experimental values of the convective coefficient can be as much as 20 % higher than those predicted by eq. (8) for laminar flow;

$$\bar{h} = 1.13 \left[\frac{\rho_f k_f^3 h_{fg} g (1 - \rho_v / \rho_f)}{\nu_f L (T_g - T_w)} \right]^{1/4}$$

Turbulent Film Condensation on a Vertical Flat surface

$$\overline{Nu}_L = \frac{\bar{h}_L (\nu_f^2 / g)^{1/3}}{k_f} = \frac{Re_\delta}{8750 + 58 Pr_f^{-0.5} (Re_\delta^{0.75} - 253)} \quad Re_\delta \geq 1800, Pr_f \geq 1$$

Or


$$\bar{h} = 0.0077 k_f \left[\frac{9(1 - \rho_v / \rho_f)}{2 \nu_f^2} \right]^{1/3} Re_\delta^{0.4} \quad \dots (14)$$

$$Re_\delta = \frac{4 \dot{m}_f}{w f_f \gamma_f} > 1800$$


$$Q = \bar{h} A_s (T_g - T_w)$$

and

$$\dot{m}_f = Q / h_{fg}$$

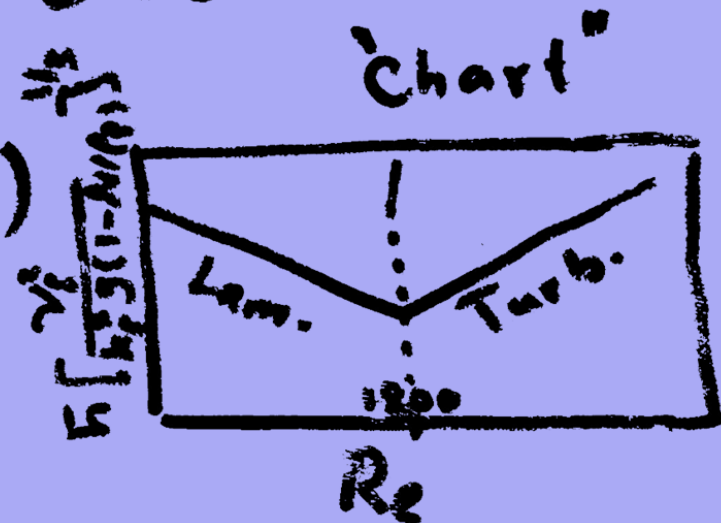

Modified Nusselt number for condensation on a vertical plate

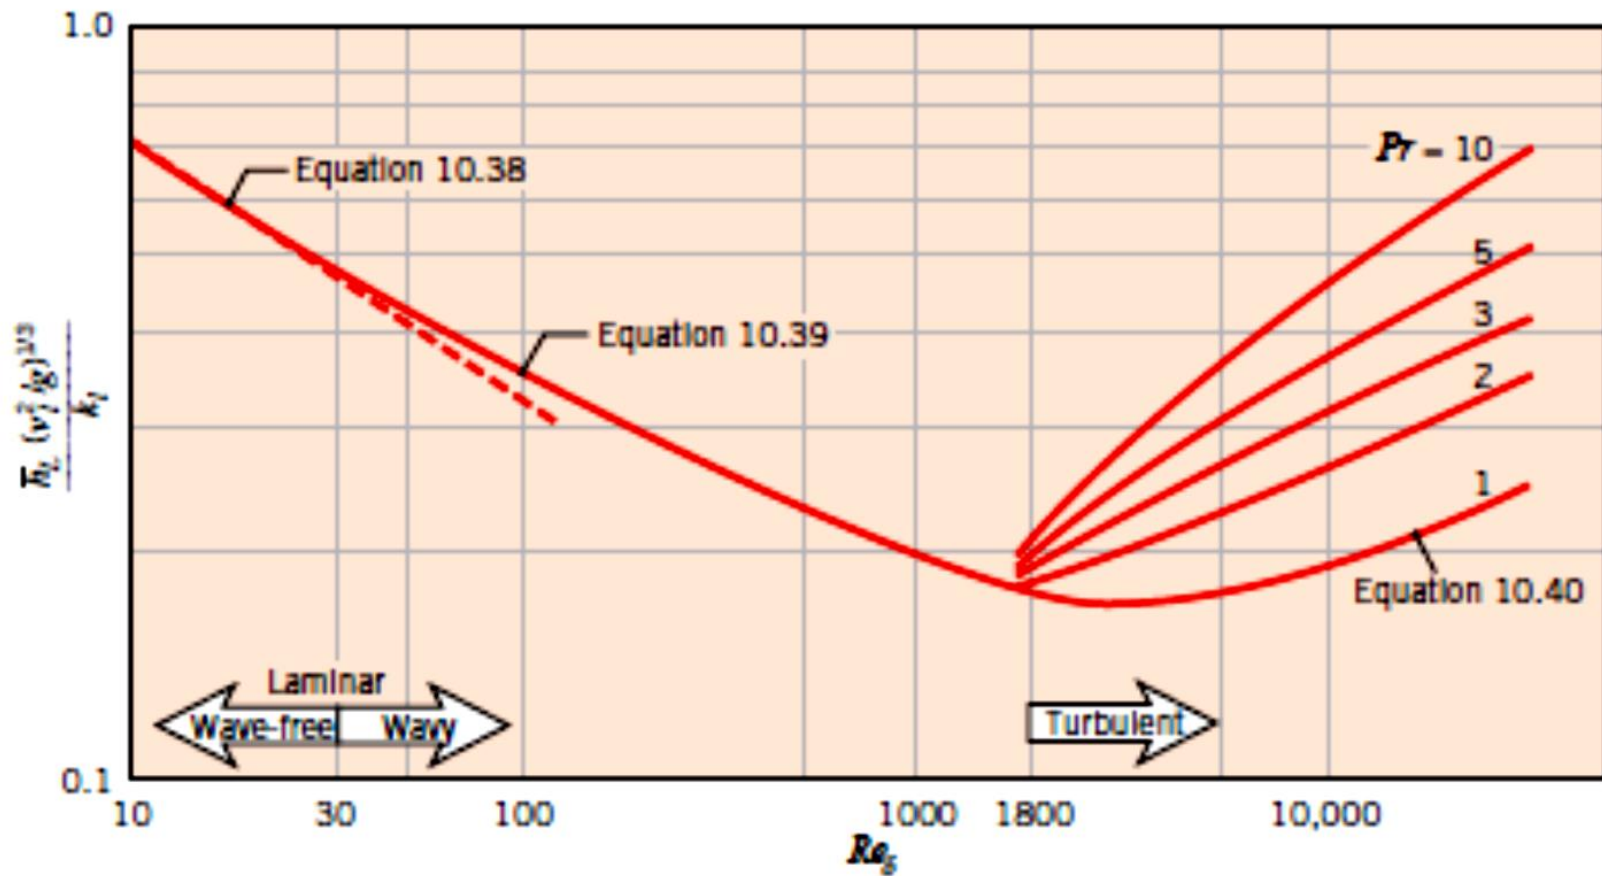

Laminar Film Condensation on an Inclined Flat Surface

use the vertical-plate eqs; but

replace g with $g \sin \theta$. 

where θ is the angle of inclination of the plate with horizontal.

Film Condensation on a Vertical Tube

Correlations of vertical plate can be used for vertical tube if the film thickness $<$ outside diam.

$$Re_s = \frac{4\dot{m}_f}{\pi D \mu_f}$$



πD is the wetted perimeter



Notes

1. Tube loading, $\Gamma = \frac{\dot{m}_f}{\pi D}$ Condensate per unit tube perimeter
2. Plate loading, $\Gamma = \frac{\dot{m}_f}{W}$
- ∴ $Re_s (\text{tube}) = \frac{4\Gamma}{\mu_f}$
3. for a tube bundle, $\Gamma = \frac{\dot{m}_f}{N_f \pi D}$

Film Condensation on a horizontal tube and a horizontal tube bank

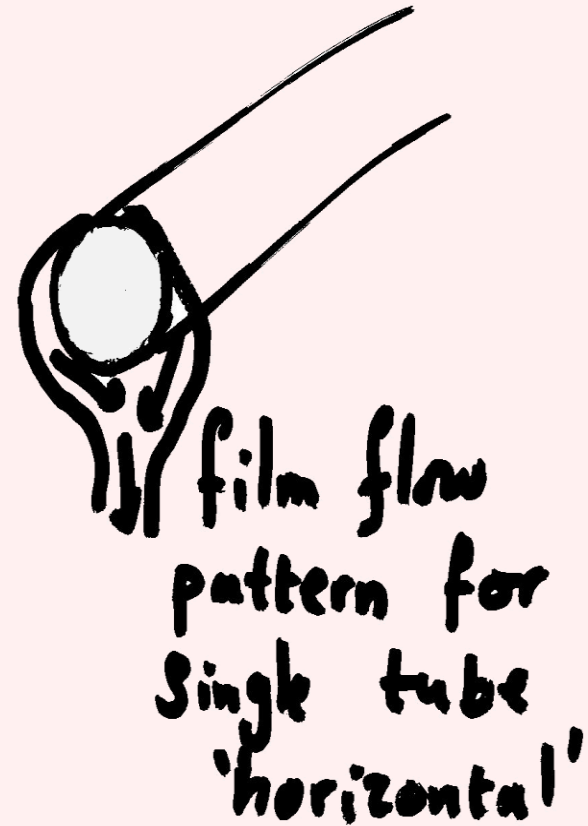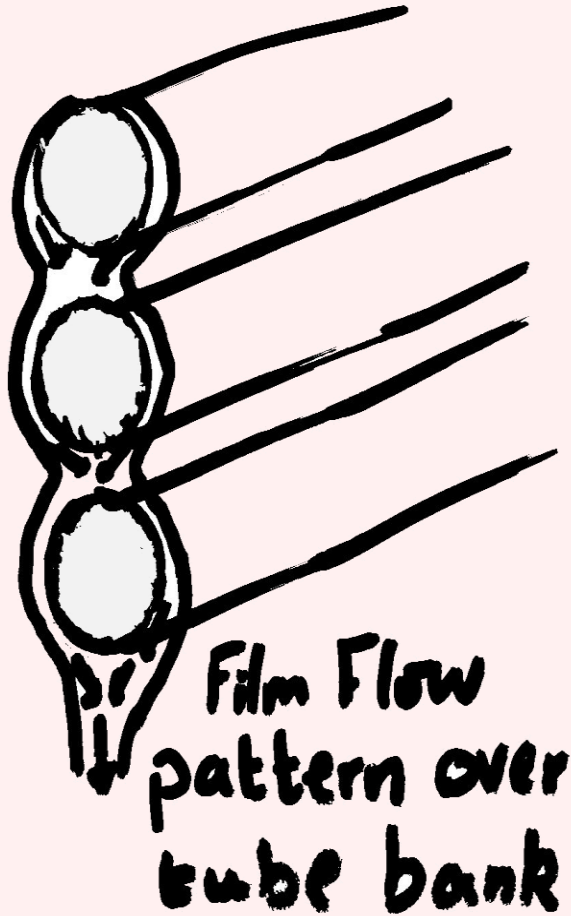

For one tube

$$\bar{h} = 0.728 \left[\frac{g \rho_f (1 - \rho_f / \rho_g) k_f^3 h_{fg}}{\mu_f (T_g - T_w) D} \right]^{1/4}$$

where D: outside diam

..... (15)

limin de
filmwise

For j tubes vertically above each other

$$\bar{h} = 0.728 \left[\frac{9 \rho_f (1 - \rho_v / \rho_f) k_f^3 h_{fg}}{\nu_f (T_g - T_w) j D} \right]^{1/4}$$

OR

$$\bar{h}_j = \bar{h} \cdot j^{-1/4} \quad \dots\dots(16)$$

Note

In practice, it is better to use index $1/6$ instead of $1/4$

$$h_{\text{tube bundle}} = \bar{h} \cdot j^{-1/6} \quad \dots\dots(17)$$